

H

We create interior centrepieces with distinctive character; inspired by moments, informed by personal narratives, enhanced by light.

Light is a universal language. Its ability to tell stories that resonate with the human spirit inspires and drives our practice



Bloom

4

- Bud Details 7
- Bud Finishes 8
- Blanket Compositions 9
- Conical Compositions 11
- Scandent Compositions 14



Leaf

17


- Leaf Details 20
- Leaf Finishes 21
- Domed Canopy Compositions 22
- Natural Canopy Compositions 25
- Twisted Canopy Compositions 28
- Wall Sculpture Details 32
- Wall Sculpture Compositions 33



Sand & Sea

35

- Ripple Details 38
- Ripple Finishes 39
- Cascading Wave Compositions 40
- Rolling Wave Compositions 42
- Shoreline Compositions 44
- Spindrift Compositions 46

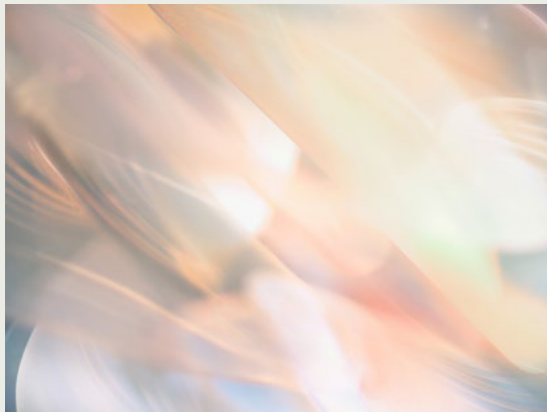

Skies

49

- Billow Details 52
- Billow Finishes 53
- Drift Compositions 54
- Wisp Compositions 56



Summer Meadow

59

- Petal Details 62
- Petal Finishes 63
- Horizontal Loops Compositions 64
- Vertical Loops Compositions 66



Spring Meadow

68

- Bud & Dew Details 71
- Bud & Dew Finishes 72
- Horizontal Shoots Compositions 73
- Vertical Shoots Compositions 75



Crystalline

77

- Crystal Details 80
- Crystal Finishes 81
- Formation Compositions 82
- Radiance Compositions 84
- Cluster Compositions 86



Flux

88

- Tube Details 91
- Tube Finishes 92
- Cascade Compositions 93
- Helix Compositions 95
- Veil Compositions 97



Bloom

Capturing the delicate
unfurling of new buds





Bloom

Bud details

A The petals are cast in the finest grade of porcelain.

Compositions are available as standard in a mix of bud shapes consisting of either:

- 50% bud B & 50% bud C
- 33% bud A, 33% bud B & 33% bud C






B 4mm diameter braided cables power and suspend the buds from the ceiling

C Cables are attached to the buds using specially designed threaded brass hubs

Cables are attached to the ceiling using either:

- a 50mm deep surface mounted ceiling plate
- 40mm diameter individual ceiling roses

Our design team can produce custom fixing solutions for locations where the standard methods are not appropriate

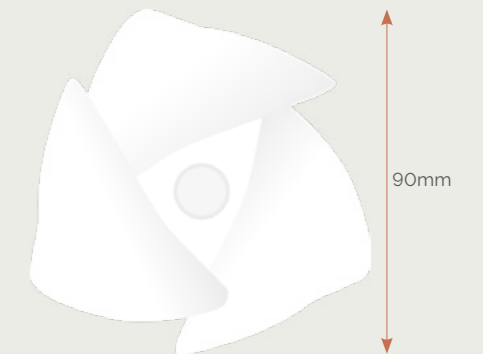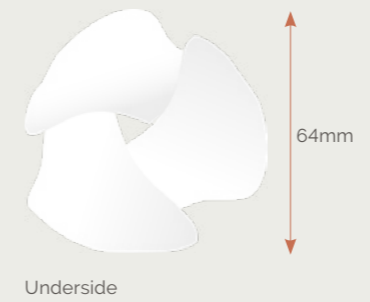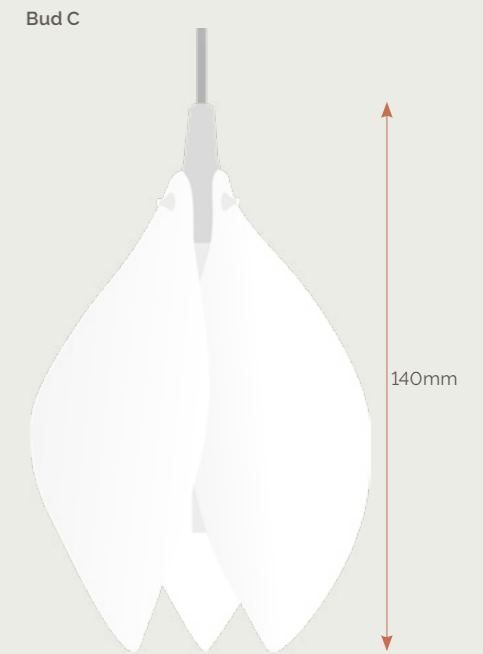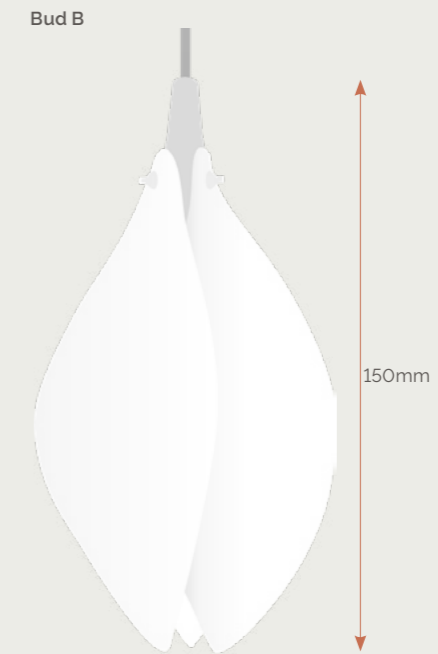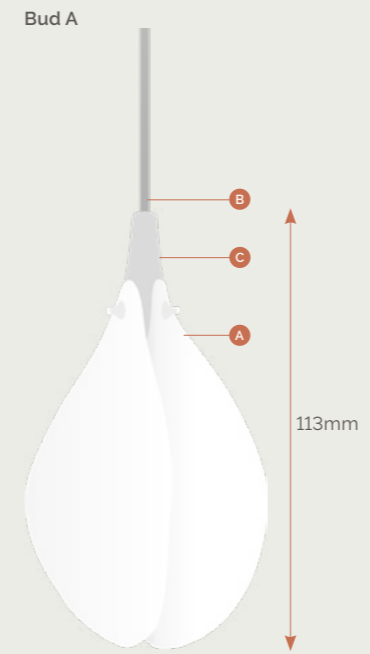

Bloom Finishes

Porcelain petals are produced by hand. Variances in colour / finish / texture are part of the inherent character of the product.

Unless otherwise specified, cable finish will be selected to align with the petal fixing finish

Petals



White Gloss
Finish ref: PWG



White Matt
Finish ref: PWM

Petal Fixings



Polished Gold Fixings
Finish Ref: GPF



Satinwood Gold Cable
4mm braided



Polished Nickel Fixings
Finish Ref: NPF



Light Grey Cable
4mm braided

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016

Bloom

Blanket

Composition
Blanket 100

Components
100 x buds: 50%
shape B, 50%
shape C

Component Fixings
Polished gold fixings
on gold braided
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
2100mm (width) x
600mm (depth) x
1000mm (drop)

Lighting
3000K G4 LEDs




Bloom

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Blanket 60


Ceiling Plate Rectangular 1500mm x 500mm	Standard Drop 600mm	Components 60 Buds	Weight 38kg
---	-------------------------------	------------------------------	-----------------------

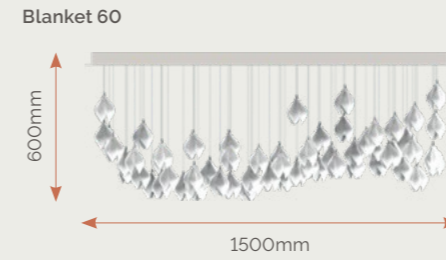

LED Light Source
60 G4 LEDs, totalling 8400 source lumens
72W power
80 CRI
3000K CCT

Blanket 100


Ceiling Plate Rectangular 2100mm x 600mm	Standard Drop 1000mm	Components 100 Buds	Weight 62kg
---	--------------------------------	-------------------------------	-----------------------

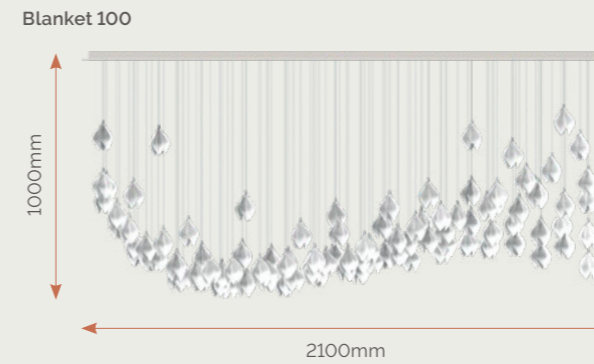

LED Light Source
100 G4 LEDs, totalling 14000 source lumens
120W power
80 CRI
3000K CCT

Blanket 200

Ceiling Plate Rectangular 3500mm x 700mm	Standard Drop 2000mm	Components 200 Buds	Weight 123kg
---	--------------------------------	-------------------------------	------------------------

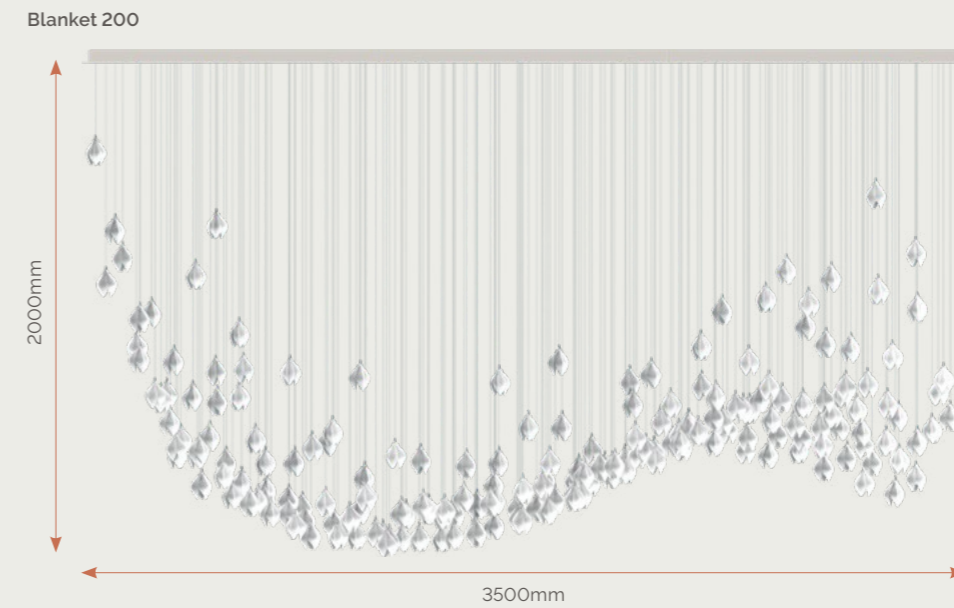

LED Light Source
200 G4 LEDs, totalling 28000 source lumens
240W power
80 CRI
3000K CCT

Bloom

Conical

Composition
Conical 100

Components
100 x Buds: 33% bud
A, 33% bud B, 33%
bud C

Component Fixings
Polished gold fixings
on gold braided
cable

Ceiling Fixing
Surface mounted
plate

Dimensions
Ø 1480mm x drop
1350mm

Lighting
3000k G4 LEDs




Bloom

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Conical 40

Ceiling Plate Circular Ø 800mm	Standard Drop 1000mm	Components 40 Buds	Weight 25kg
---	--------------------------------	------------------------------	-----------------------

LED Light Source
40 G4 LEDs, totalling 5600 source lumens
48W power
80 CRI
3000K CCT



Conical 85




Ceiling Plate Circular Ø 800mm	Standard Drop 2050mm	Components 85 Buds	Weight 42kg
---	--------------------------------	------------------------------	-----------------------

LED Light Source
85 G4 LEDs, totalling 11900 source lumens
102W power
80 CRI
3000K CCT

Conical 105

Ceiling Plate Circular Ø 800mm	Standard Drop 4000mm	Components 105 Buds	Weight 48kg
---	--------------------------------	-------------------------------	-----------------------

LED Light Source
105 G4 LEDs, totalling 14700 source lumens
126W power
80 CRI
3000K CCT



Bloom


Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Conical 31

Ceiling Plate Oval 900mm x 300mm	Standard Drop 1050mm	Components 31 Buds	Weight 17kg
---	--------------------------------	------------------------------	-----------------------

LED Light Source
31 G4 LEDs, totalling 4340 source lumens
38W power
80 CRI
3000K CCT

Conical . 31



Conical . 70




Conical . 100



Conical 70

Ceiling Plate Oval 1350mm x 450mm	Standard Drop 1050mm	Components 70 Buds	Weight 36kg
--	--------------------------------	------------------------------	-----------------------

LED Light Source
70 G4 LEDs, totalling 9800 source lumens
84W power
80 CRI
3000K CCT

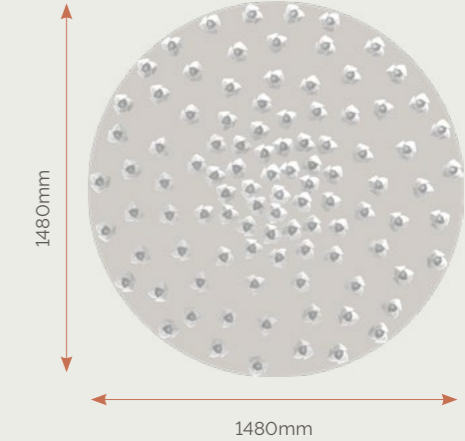

Conical 100

Ceiling Plate Circular Ø 1480mm	Standard Drop 1350mm	Components 100 Buds	Weight 70kg
--	--------------------------------	-------------------------------	-----------------------

LED Light Source
100 G4 LEDs, totalling 14000 source lumens
120W power
80 CRI
3000K CCT

Bloom

Scandent

Composition
Scandent 105

Components
105 Buds: 50% bud B,
50% bud C

Component Fixings
Polished gold fixings
on gold braided
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
Ø 800mm x 5000mm
(drop)

Lighting
3000K G4 LEDs



Bloom

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---


Scandent 24



Scandent 45






Scandent 75



Scandent 24

Ceiling Plate Circular Ø 400mm	Standard Drop 600mm	Components 24 Buds	Weight 14kg
---	-------------------------------	------------------------------	-----------------------

LED Light Source
24 G4 LEDs, totalling 3350 source lumens
29W power
80 CRI
3000K CCT



Scandent 45

Ceiling Plate Circular Ø 600mm	Standard Drop 800mm	Components 45 Buds	Weight 26kg
---	-------------------------------	------------------------------	-----------------------

LED Light Source
45 G4 LEDs, totalling 6300source lumens
54W power
80 CRI
3000K CCT

Scandent 75

Ceiling Plate Circular Ø 800mm	Standard Drop 1000mm	Components 75 Buds	Weight 41kg
---	--------------------------------	------------------------------	-----------------------

LED Light Source
75 G4 LEDs, totalling 10500 source lumens
90W power
80 CRI
3000K CCT

Bloom

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Scandent 105

Ceiling Plate Circular Ø 800mm	Standard Drop 5000mm	Components 105 Buds	Weight 52kg
---	--------------------------------	-------------------------------	-----------------------

LED Light Source
105 G4 LEDs, totalling 14700 source lumens
126W power
80 CRI
3000K CCT

Scandent 150

Ceiling Plate Circular Ø 1150mm	Standard Drop 6500mm	Components 150 Buds	Weight 80kg
--	--------------------------------	-------------------------------	-----------------------


LED Light Source
150 G4 LEDs, totalling 21000 source lumens
180W power
80 CRI
3000K CCT

Scandent 225


Ceiling Plate Circular Ø 1480mm	Standard Drop 8000mm	Components 225 Buds	Weight 129kg
--	--------------------------------	-------------------------------	------------------------

LED Light Source
225 G4 LEDs, totalling 31500 source lumens
270W power
80 CRI
3000K CCT



Scandent 105



Scandent 150



Scandent 225

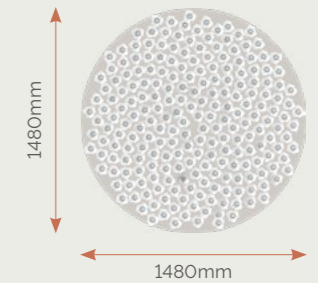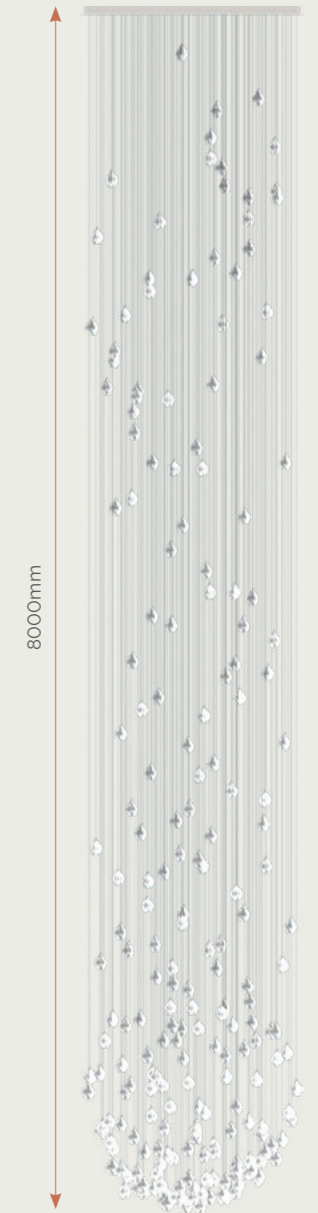



Leaf

Evoking the quiet
wonder of tree
canopies





Leaf

Leaf details

A The leaves are cast in the finest grade of porcelain and decorated by hand using precious metal glazes.

Compositions are designed to incorporate a third of each leaf shape for a naturalistic impression.

B Cables are attached to the leaves using specially designed threaded brass fixings.

C 0.4mm diameter microfne cables suspend the leaves in air almost invisibly.

Cables are attached to the ceiling using either:


- a 3mm deep surface mounted ceiling plate
- 14mm diameter individual micro ceiling roses

Ceiling fixings are powder coated in RAL 9016 (white) as standard.

Compositions are lit using either:

- Downlights positioned within the footprint of the composition
- Micro pendants suspended within the body of the composition

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate

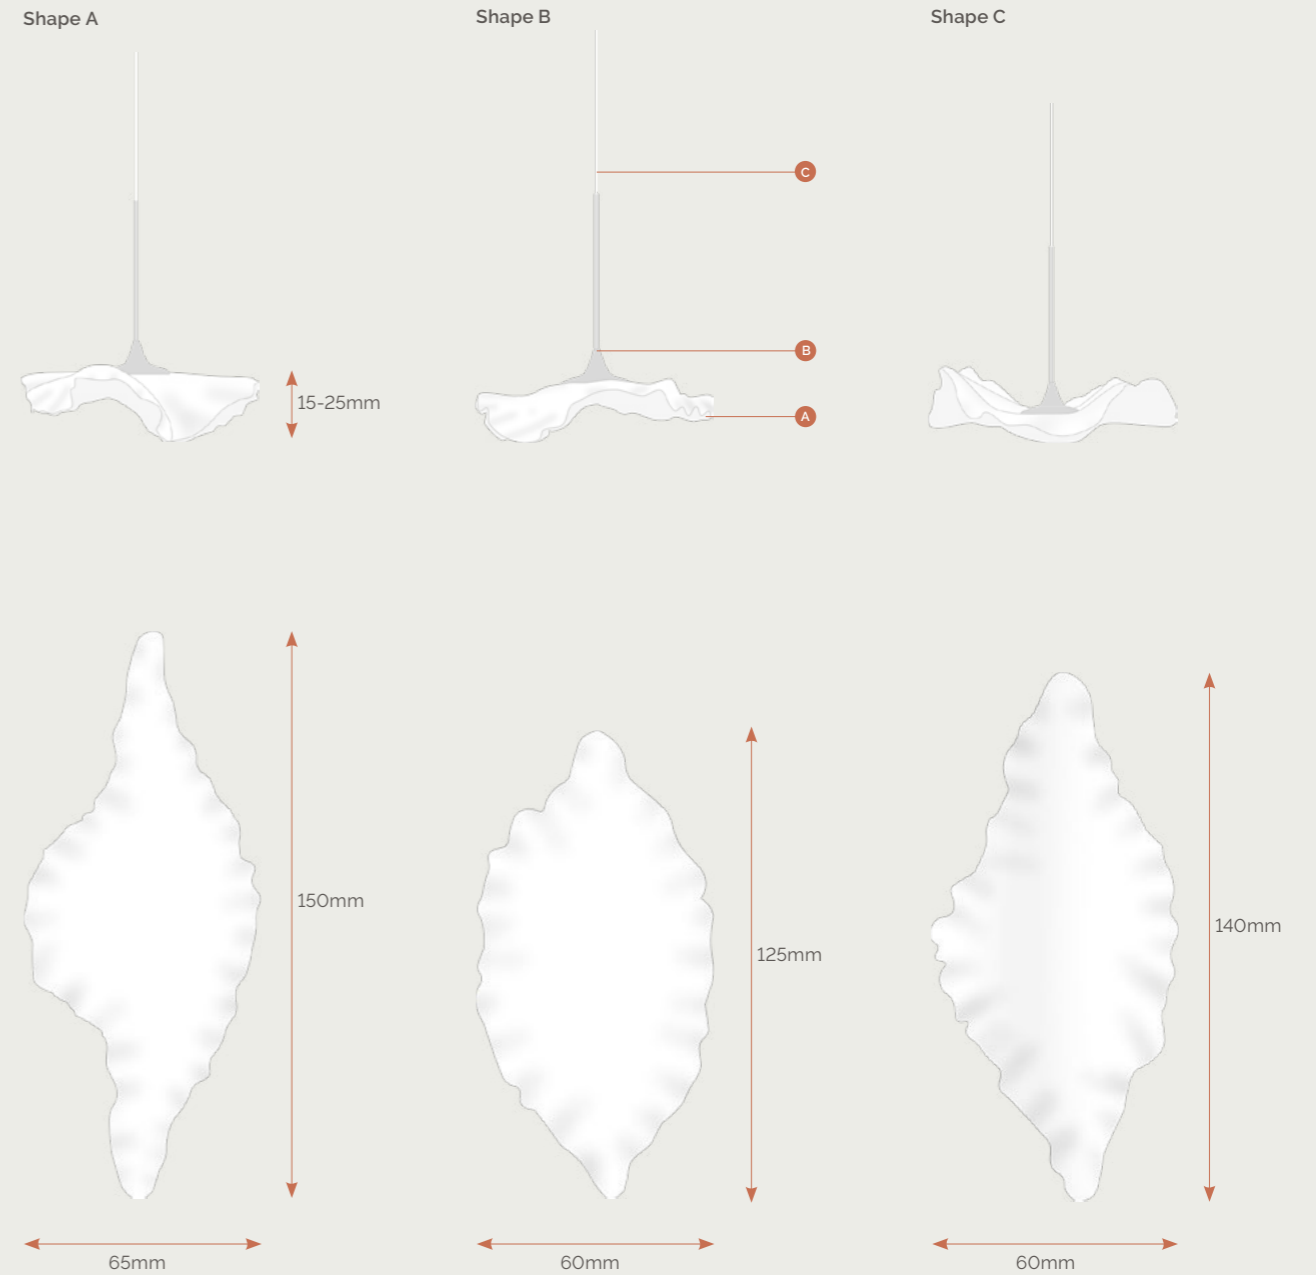

Leaf Finishes

Porcelain leaves are cast & decorated by hand. Variances in colour / finish / size / texture are part of the inherent character of the product.

All leaves are white on the reverse to display the soft white of the fine porcelain

Unless otherwise specified, cable finish will be selected to align with the leaf fixing finish

Leaves



Face: Gold / Reverse: White Gloss
Finish Ref: LGF



Face: Gold Edge / Reverse: White Gloss
Finish Ref: LGE



Face: White Gloss / Reverse: White Gloss
Finish Ref: LWG



Face: Platinum / Reverse: White Gloss
Finish Ref: LPF



Face: Platinum Edge / Reverse: White Gloss
Finish Ref: LPE



Face: White Matt / Reverse: White Matt
Finish Ref: LWM



Face: Bronze / Reverse: White Gloss
Finish Ref: LBF



Face: Bronze Edge / Reverse: White Gloss
Finish Ref: LBE

Leaf Fixings



Polished Gold Fixings
Finish Ref: GPF



Gold Cable
0.4mm microfine



Polished Nickel fixings
Finish Ref: NPF



Silver Cable
0.4mm microfine

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016

Domed Canopy

Leaf

Composition
Domed Canopy 192

Components
192 x leaves: 50%
gold, 50% gloss
white with gold back
(special)

Component Fixings
Polished gold fixings
on gold microfibre
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
Ø 1480mm x drop
960mm

Lighting
1 ceiling recessed
downlight





Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Domed Canopy 84

Ceiling Plate Circular Ø 1000mm	Standard Drop 960mm	Components 84 Leaves	Weight 12kg
--	-------------------------------	--------------------------------	-----------------------



Domed Canopy 84

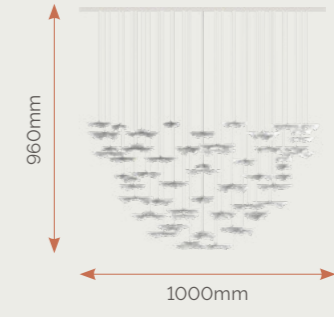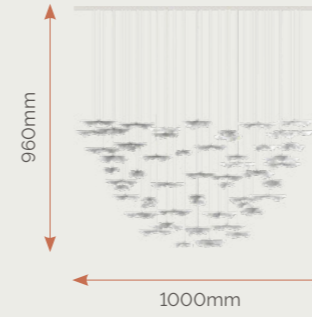

Domed Canopy 192

LED Light Source 1 ceiling recessed downlight totalling 664 source lumens 9.2W power 90 CRI 2700K CCT	or 3 micro pendants totalling: 675 source lumens 8.1W power 90CRI 2700K CCT	Ceiling Plate Circular Ø 1480mm	Standard Drop 960mm	Components 192 Leaves	Weight 27kg
--	---	--	-------------------------------	---------------------------------	-----------------------



Domed Canopy 192

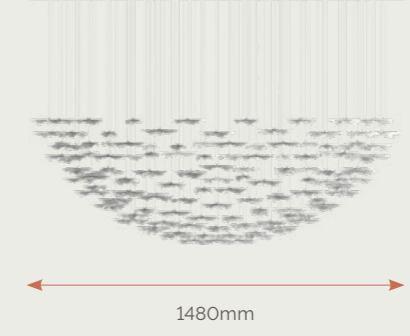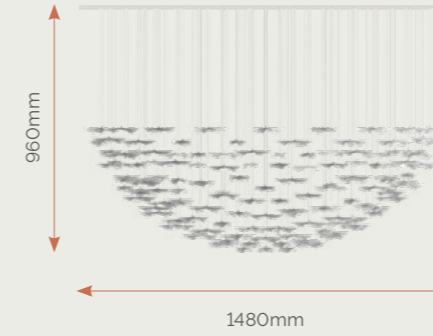

Domed Canopy 270

Ceiling Plate Circular Ø 2000mm	Standard Drop 960mm	Components Leaves	Weight 40kg
LED Light Source 1 ceiling recessed downlight totalling 664 source lumens 9.2W power 90 CRI 2700K CCT	or 5 micro pendants totalling: 1125 source lumens 13.5W power 90CRI 2700K CCT		

Domed Canopy 270

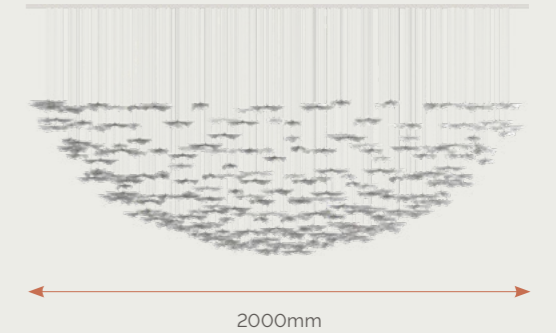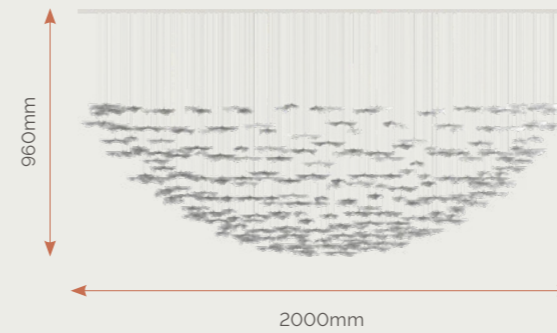



Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Domed Canopy 102

Ceiling Plate Oval 1200mm x 1000mm	Standard Drop 960mm	Components 102 Leaves	Weight 15kg
---	-------------------------------	---------------------------------	-----------------------



Domed Canopy 102

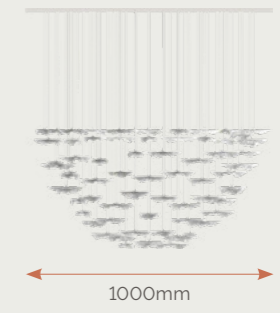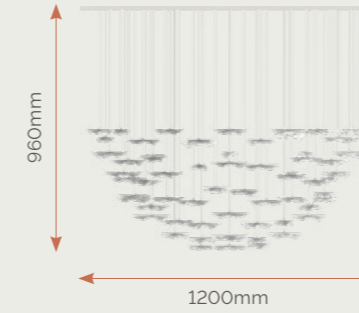

Domed Canopy 170

LED Light Source 1 ceiling recessed downlights totalling 664 Source lumens 9.2W 90CRI 2700K	or 4 micro pendants totalling: 900 Source lumens 10.8W 90CRI 2700K	Ceiling Plate Oval 2000mm x 1000mm	Standard Drop 960mm	Components 170 Leaves	Weight 24kg
--	--	---	-------------------------------	---------------------------------	-----------------------



Domed Canopy 170

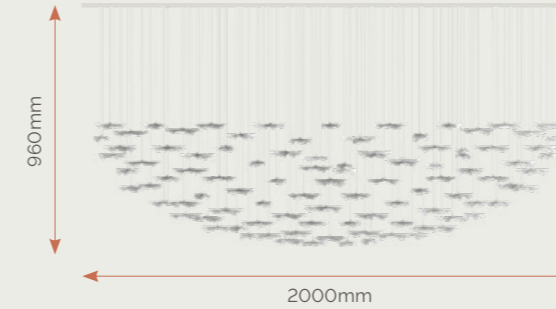

Domed Canopy 252

LED Light Source 4 ceiling recessed downlights totalling 2656 Source lumens 36.8 W 90CRI 2700K	or 5 micro pendants totalling: 1125 Source lumens 13.5W 90CRI 2700K	Ceiling Plate Oval 2980mm x 1480mm	Standard Drop 960mm	Components 252 Leaves	Weight 45kg
LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 6 micro pendants totalling: 1350 Source lumens 16.2W 90CRI 2700K				

Domed Canopy 252

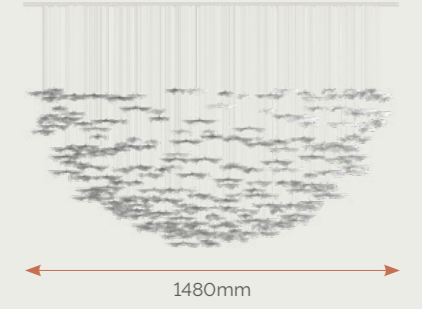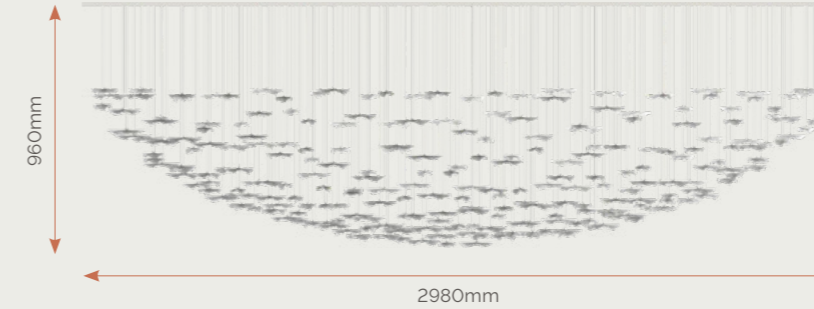

Leaf

Natural Canopy

Composition
Natural Canopy 310

Components
310 x leaves:
50% bronze, 50%
bronze edge

Component Fixings
Polished nickel
fixings on silver
microfine cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
Ø 1480mm x drop
3000mm

Lighting
3 x ceiling downlights



Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Ceiling Plate Circular Ø800mm	Standard Drop 3000mm	Components 108 ripples	Weight 11kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 7 micro pendants totalling: 1575 Source lumens 18.9W 90CRI 2700K
--	---

Ceiling Plate Circular Ø 1000mm	Standard Drop 3000mm	Components 140 ripples	Weight 15kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 9 micro pendants totalling: 2025 Source lumens 24.3W 90CRI 2700K
--	---

Ceiling Plate Circular Ø 1480mm	Standard Drop 3000mm	Components 310 ripples	Weight 33kg
--	--------------------------------	----------------------------------	-----------------------


LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 12 micro pendants totalling: 2700 Source lumens 32.4W 90CRI 2700K
--	--

Natural Canopy Medium Drop 108


Natural Canopy Medium Drop 140

Natural Canopy Medium Drop 310



Natural Canopy
Medium Drop 108



Natural Canopy
Medium Drop 140



Natural Canopy
Medium Drop 310

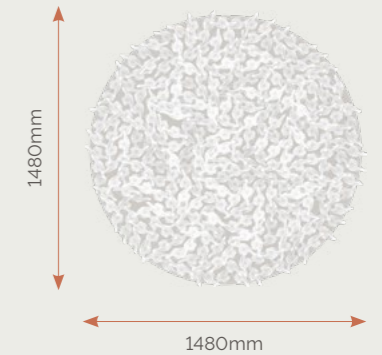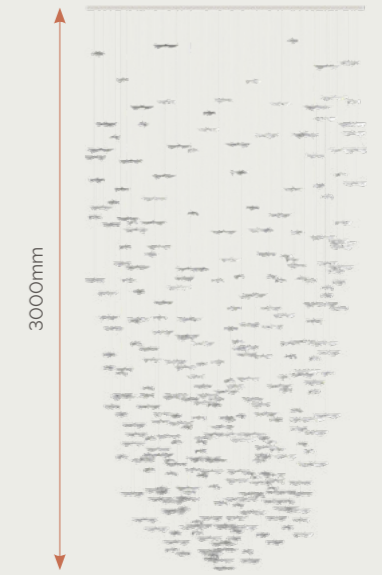

Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Natural Canopy Long Drop 108

Ceiling Plate Circular Ø 800mm	Standard Drop 6000mm	Components 108 ripples	Weight 11kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 9 micro pendants totalling: 2025 Source lumens 24.3W 90CRI 2700K
--	---

Natural Canopy Long Drop 140

Ceiling Plate Circular Ø 1000mm	Standard Drop 6000mm	Components 140 ripples	Weight 15kg
--	--------------------------------	----------------------------------	-----------------------



LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 12 micro pendants totalling: 2700 Source lumens 32.4W 90CRI 2700K
--	--

Natural Canopy Long Drop 310



Ceiling Plate Circular Ø 1480mm	Standard Drop 6000mm	Components 310 ripples	Weight 33kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 14 micro pendants totalling: 3150 Source lumens 37.8W 90CRI 2700K
--	--

Natural Canopy Medium Drop 108

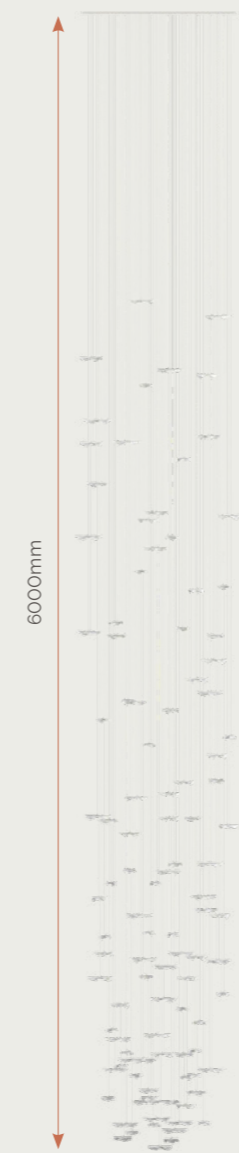

Natural Canopy Medium Drop 140

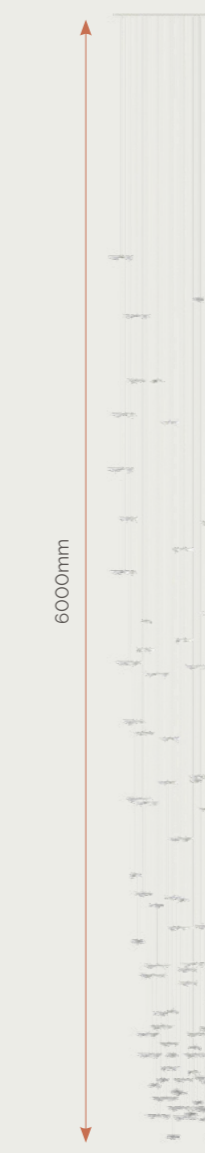

Natural Canopy Long Drop 310



Approx Scale: 1:40

Leaf

Twisted Canopy

Composition
Twisted Canopy 144

Components
144 x leaves: 50%
gold, 50% gold edge

Component Fixings
Polished gold fixings
on gold microfibre
cable

Ceiling Fixing
Individual micro
ceiling roses

Dimensions
2000mm (length)
x 1000mm (depth)
1000mm (drop)

Lighting
7 x micro pendant A





Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Twisted Canopy 87

Ceiling Plate Oval 1500mm x 750mm	Standard Drop 750mm	Components 87 Leaves	Weight 8kg
--	-------------------------------	--------------------------------	----------------------

Twisted Canopy 87


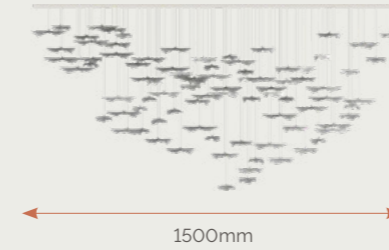


LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 5 micro pendants totalling: 1125 Source lumens 13.5W 90CRI 2700K
--	---

Twisted Canopy 144

Ceiling Plate Oval 2000mm x 1000mm	Standard Drop 1000mm	Components 144 Leaves	Weight 23kg
---	--------------------------------	---------------------------------	-----------------------

Twisted Canopy 144


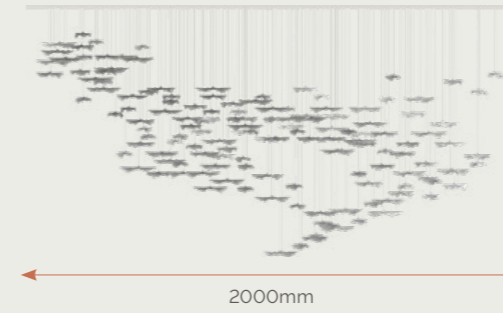


LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 7 micro pendants totalling: 1575 Source lumens 18.9W 90CRI 2700K
---	---

Twisted Canopy 258

Ceiling Plate Oval 2980mm x 1480mm	Standard Drop 1500mm	Components 258 Leaves	Weight 49kg
---	--------------------------------	---------------------------------	-----------------------

Twisted Canopy 258

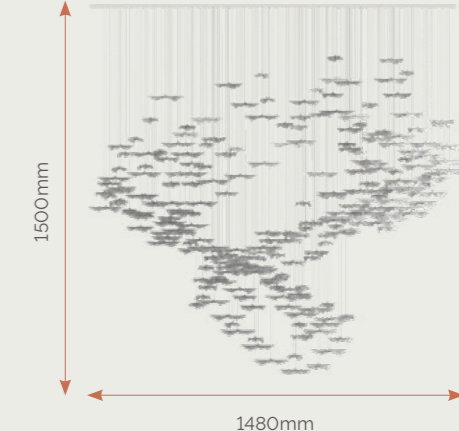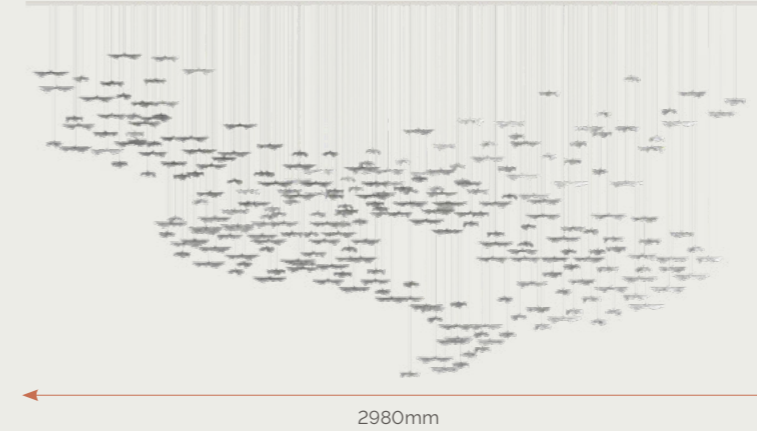

LED Light Source 6 ceiling recessed downlights totalling 3984 Source lumens 55.2 W 90CRI 2700K	or 12 micro pendants totalling: 2700 Source lumens 32.4W 90CRI 2700K
---	--

Leaf

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Twisted Canopy 98

Ceiling Plate Circular Ø 750mm	Standard Drop 1500mm	Components 98 Leaves	Weight 9kg
---	--------------------------------	--------------------------------	----------------------

LED Light Source 1 ceiling recessed downlights totalling 664 Source lumens 9.2 W 90CRI 2700K	or 5 micro pendants totalling: 1125 Source lumens 13.5W 90CRI 2700K
---	---

Twisted Canopy 132

Ceiling Plate Circular Ø 1000mm	Standard Drop 2000mm	Components 132 Leaves	Weight 14kg
--	--------------------------------	---------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 7 micro pendants totalling: 1575 Source lumens 18.9W 90CRI 2700K
--	---

Twisted Canopy 194


Ceiling Plate Circular Ø 1480mm	Standard Drop 3000mm	Components 194 Leaves	Weight 31kg
--	--------------------------------	---------------------------------	-----------------------

LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 9 micro pendants totalling: 2025 Source lumens 24.3W 90CRI 2700K
---	---





Twisted Canopy 98



Twisted Canopy 132

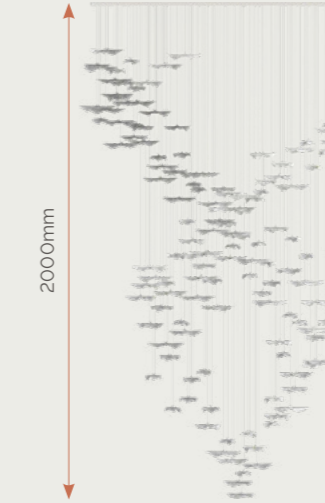

Twisted Canopy 194

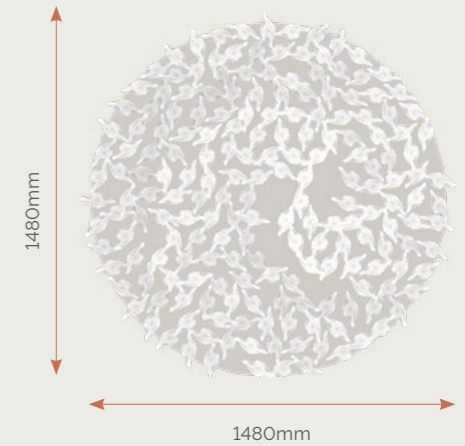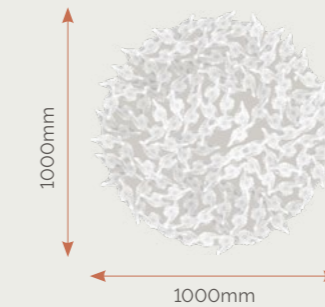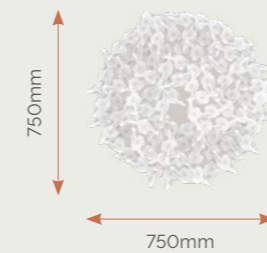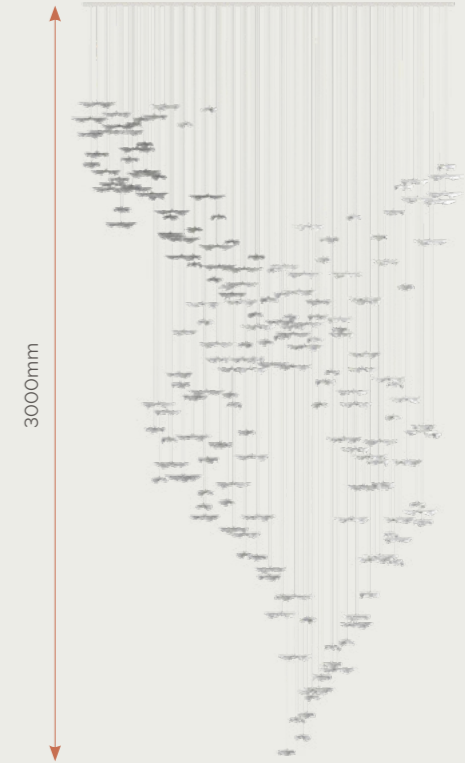



Leaf Wall Sculpture

Leaf details

The leaves are cast in the finest grade of porcelain and decorated by hand using precious metal glazes.

Compositions are designed to incorporate a third of each leaf shape for a naturalistic impression.

- A** 50mm deep plated brass stems project the leaves off the walls.
- B** The stems attach to the leaves with a socket allowing for rotation and angling to suit the composition and lighting.

Stems can be attached to the walls using a threaded screw directly into a standard rawl plug.

Wall sculptures do not include lighting. Compositions can be enhanced by downlights positioned above the composition to project leafy shadows onto the surrounding wall.

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate





Shape A



Shape B



Shape C

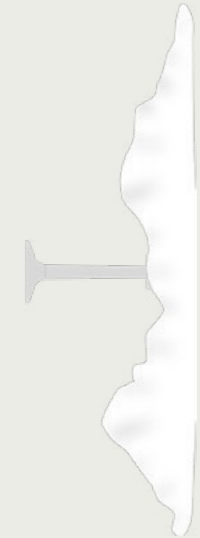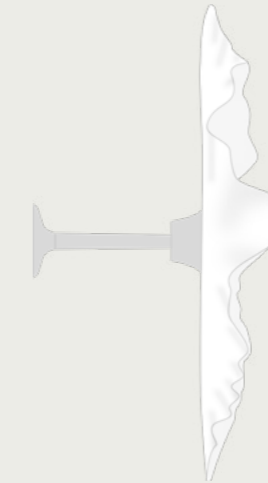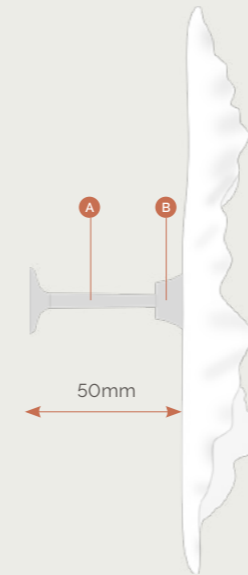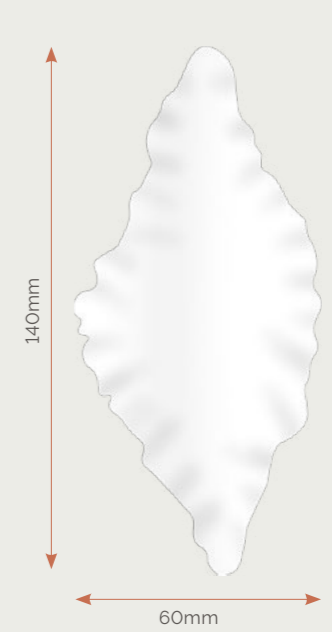

Leaf

Wall Sculpture

Composition
Leaf Wall Sculpture
Twist 50

Components
50 x leaves - 50%
platinum and 30%
platinum edge

Component Fixings
Polished nickel
socket on polished
nickel stem

Wall Fixing
Standard threaded
screw

Dimensions
1250mm (width) x
2000mm (height) x
60mm (depth)


Lighting
Not included




Leaf Wall Sculpture

Eddy 50

Dimensions	Lighting	Components	Weight
2500mm x 1000mm	Not included	50 Leaves	3kg

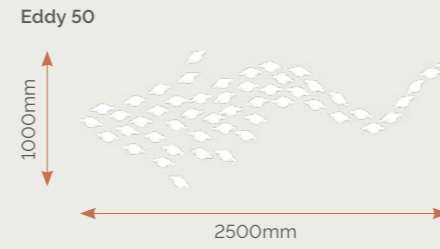


Eddy 100

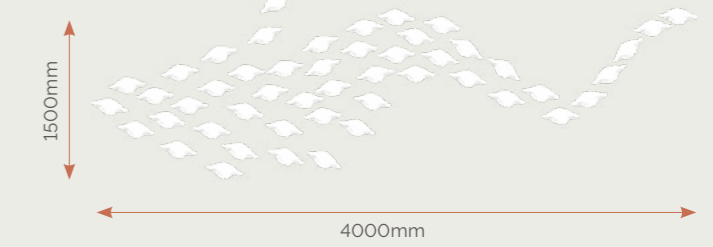


Eddy 100

Dimensions	Lighting	Components	Weight
4000mm x 1500mm	Not included	100 Leaves	5kg

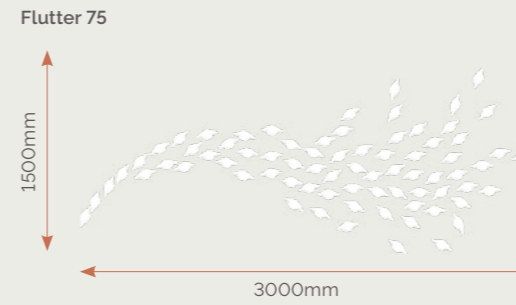

Flutter 125

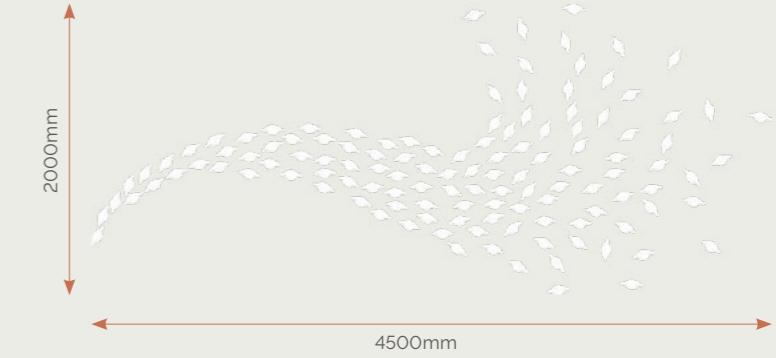

Flutter 75

Dimensions	Lighting	Components	Weight
3000mm x 1500mm	Not included	75 Leaves	4kg

Flutter 125

Dimensions	Lighting	Components	Weight
4500mm x 2000mm	Not included	125 Leaves	7kg



Twist 225



Twist 50

Dimensions	Lighting	Components	Weight
1250mm x 2000mm	Not included	50 Leaves	3kg

Twist 225

Dimensions	Lighting	Components	Weight
4250mm x 4500mm	Not included	225 Leaves	12kg



Sand & Sea

Echoing moments
of convergence along
the shore





Sand & Sea Ripple details

- A** The ripples are sand cast in crystal. Each ripple contains a ridged side & an undulating side. Compositions should be installed to contain 50% of each.
- B** Cables are attached to the ripples using specially designed threaded brass fixings.
- C** 0.6mm diameter microfne cables suspend the ripples in air almost invisibly.

Cables are attached to the ceiling using either:

- a 3mm deep surface mounted ceiling plate
- 14mm diameter individual micro ceiling roses

Compositions are lit using either:





- Downlights positioned within the footprint of the composition
- Micro pendants suspended within the body of the composition

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate

Undulating Orientation



Ridged Orientation

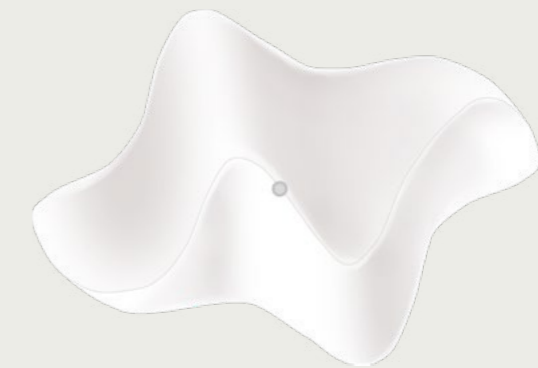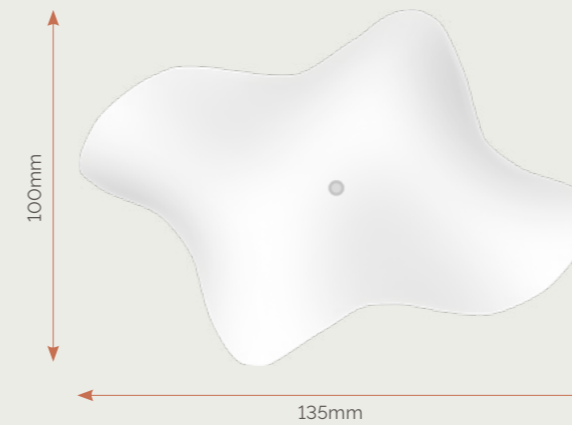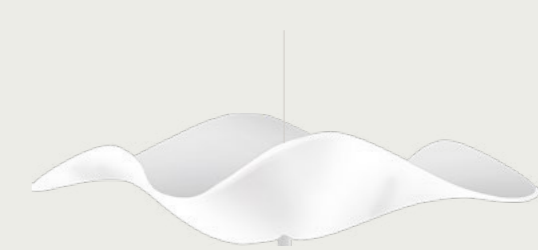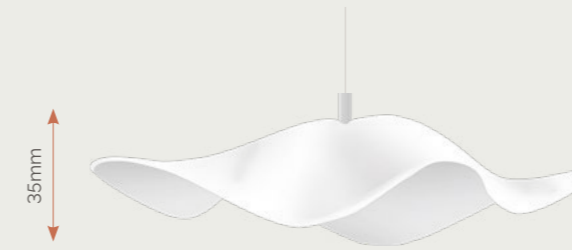

Sand & Sea Finishes

Crystal ripples are decorated by hand. Variances in colour / finish / size / shape / texture are part of the inherent character of the product.

Each ripple contains a ridged side & an undulating side. The glazes will appear more or less varied depending on which side is glazed.

The glazed face of the "sand" ripples is always positioned facing upwards.

Unless otherwise specified, cable finish will be selected to align with the ripple fixing finish

Sand Ripples - 33% of standard composition



Gold
Finish Ref: RGO



Platinum
Finish Ref: RPL



Pearl
Finish Ref: RPE

Sea Ripples - 67% of standard compositions



Clear
Finish Ref: RCL



Frosted
Finish Ref: RFR



Blush
Finish Ref: RBC



Blush Frosted
Finish Ref: RBF

Ripple Fixings



Polished Gold Fixings
Finish Ref: GPF



Gold Cable
0.6mm microfine



Polished Nickel Fixings
Finish Ref: NPF



Silver Cable
0.6mm microfine

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016

Sand & Sea

Cascading Waves

Composition
Cascading Wave 135

Components
135 ripples - 33%
gold and 67% clear

Ripple Fixings
Polished gold fixings
on gold coloured
microfine cable

Ceiling Fixing
Surface mounted
plate

Dimensions
Ø 1000 mm x drop
2000mm

Lighting
3 ceiling recessed
downlights



Sand & Sea

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Cascading Wave 69

Ceiling Plate Circular Ø 750mm	Standard Drop 1500mm	Components 69 ripples	Weight 14kg
---	--------------------------------	---------------------------------	-----------------------

LED Light Source 1 ceiling recessed downlights totalling 664 Source lumens 9.2 W 90CRI 2700K	or 4 micro pendants totalling: 900 Source lumens 10.8 W 90CRI 2700K
---	---

Cascading Wave 135

Ceiling Plate Circular Ø 1000 mm	Standard Drop 2000mm	Components 135 ripples	Weight 26kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 27.6 W 90CRI 2700K	or 7 micro pendants totalling: 1575 Source lumens 18.9W 90CRI 2700K
---	---

Cascading Wave 285

Ceiling Plate Circular Ø 1480 mm	Standard Drop 3000mm	Components 285 ripples	Weight 56kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 13 micro pendants totalling: 2925 Source lumens 35.1W 90CRI 2700K
---	--



Cascading Wave 69



Cascading Wave 135



Cascading Wave 285

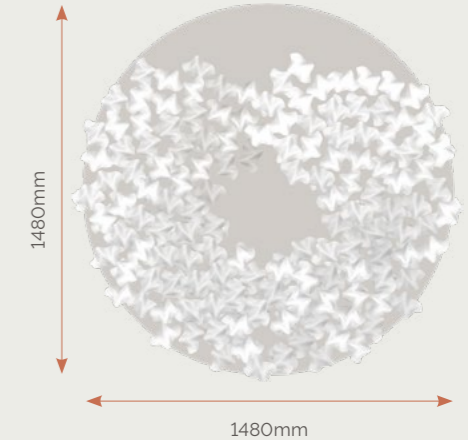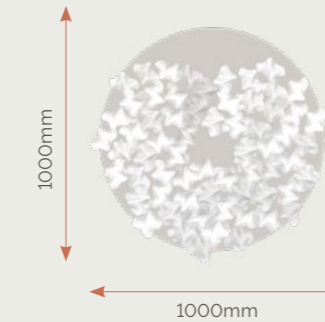

Sand & Sea

Rolling Waves

Composition
Rolling Wave 135

Components
135 ripples - 33% gold
and 67% clear

Ripple Fixings
Polished gold fixings
on gold coloured
microfine cable

Ceiling Fixing
Surface mounted
plate

Dimensions
2000mm x 1000mm
x drop 1000mm

Lighting
5 ceiling recessed
downlights





Sand & Sea

Rolling Wave 69

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---



Ceiling Plate Oval 1500mm x 750mm	Standard Drop 750mm	Components 69 ripples	Weight 18kg
--	-------------------------------	---------------------------------	-----------------------

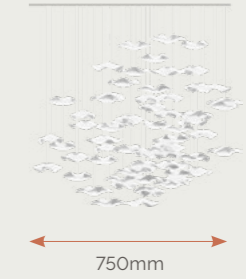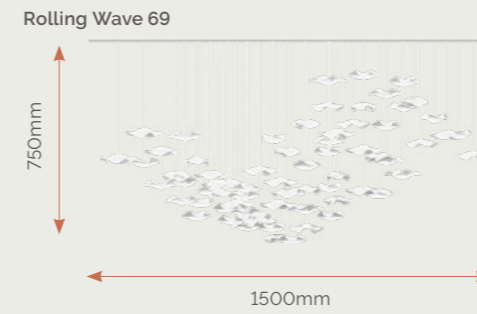

Rolling Wave 135

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 4 micro pendants totalling: 900 Source lumens 10.8W 90CRI 2700K
--	--

Ceiling Plate Oval 2000mm x 1000mm	Standard Drop 1000mm	Components 135 ripples	Weight 34kg
---	--------------------------------	----------------------------------	-----------------------

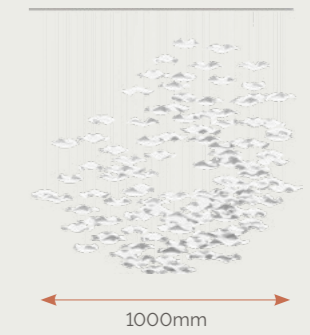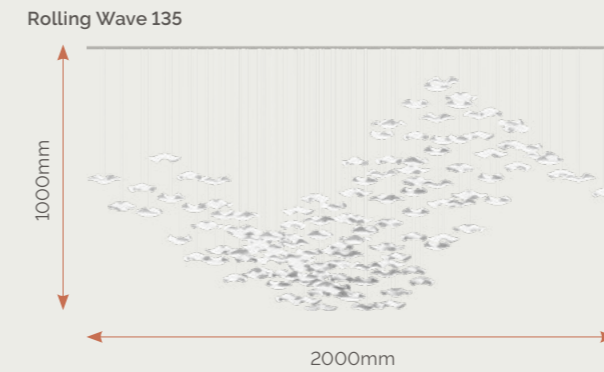


Rolling Wave 258

LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 6 micro pendants totalling: 1350 Source lumens 16.2W 90CRI 2700K
---	---

Ceiling Plate Oval 2980mm x 1480mm	Standard Drop 1500mm	Components 258 ripples	Weight 71kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source 6 ceiling recessed downlights totalling 3984 Source lumens 55.2 W 90CRI 2700K	or 11 micro pendants totalling: 2475 Source lumens 29.7 W 90CRI 2700K
---	---

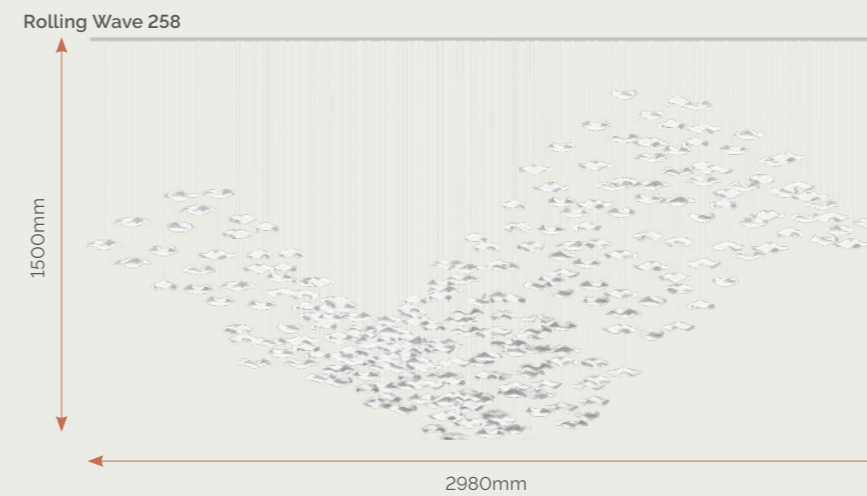

Sand & Sea

Shorelines

Composition
Sand & Sea
Shoreline 300

Components
300 ripples - 33%
gold and 67% clear

Ripple Fixings
Polished gold fixings
on gold coloured
microfine cable

Ceiling Fixing
Surface mounted
plate

Dimensions
Ø 1000mm x drop
7000mm

Lighting
15 micro pendants



Sand & Sea

Shoreline 180

Shoreline 249

Shoreline 300

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Ceiling Plate Circular Ø 1000mm	Standard Drop 4000mm	Components 180 ripples	Weight 32kg
--	--------------------------------	----------------------------------	-----------------------





LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 9 micro pendants totalling: 2025 source lumens 24.3W 90CRI 2700K
--	---

Ceiling Plate Circular Ø 1000mm	Standard Drop 5500mm	Components 249 ripples	Weight 42kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 12 micro pendants totalling: 2700 Source lumens 32.4W 90CRI 2700K
--	--

Ceiling Plate Circular Ø 1000mm	Standard Drop 7000mm	Components 300 ripples	Weight 49kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 15 micro pendants totalling: 3375 Source lumens 40.5W 90CRI 2700K
--	--

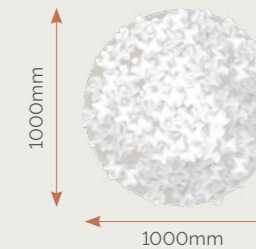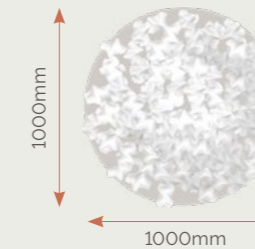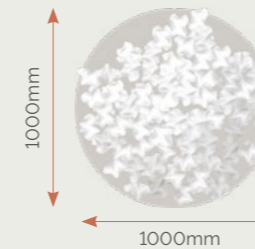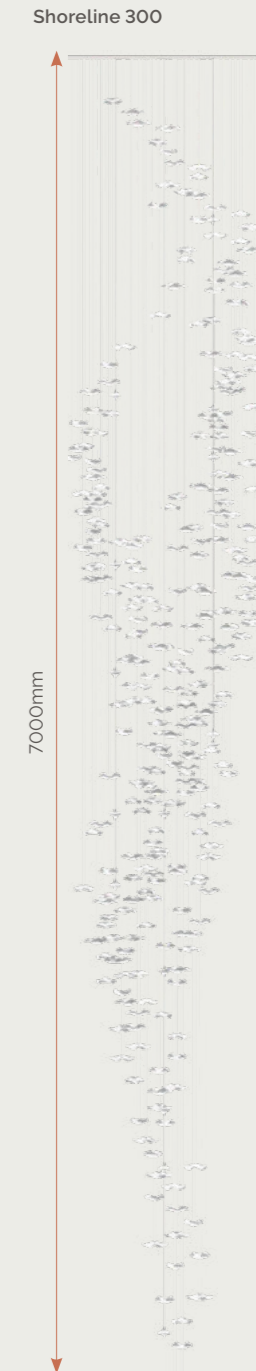

Approx Scale: 1:40

Sand & Sea

Spindriffts

Composition
Spindrifft 170

Components
170 ripples - 33%
gold and 67% clear

Ripple Fixings
Polished gold fixings
on gold coloured
microfine cable

Ceiling Fixing
Surface mounted
plate

Dimensions
Ø 1480mm x drop
15000mm

Lighting
8 micro pendants



Sand & Sea

Spindrift 45

Spindrift 80

Spindrift 170

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Ceiling Plate Circular Ø 750mm	Standard Drop 750mm	Components 45 ripples	Weight 12kg
---	-------------------------------	---------------------------------	-----------------------

LED Light Source 1 ceiling recessed downlights totalling 664 Source lumens 9.2 W 90CRI 2700K	or 3 micro pendants totalling: 675 Source lumens 8.1W 90CRI 2700K
---	---


Ceiling Plate Circular Ø 1000mm	Standard Drop 1000mm	Components 80 ripples	Weight 20kg
--	--------------------------------	---------------------------------	-----------------------

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 27.6 W 90CRI 2700K	or 6 micro pendants totalling: 1350 Source lumens 16.2W. 90CRI 2700K
---	--


Ceiling Plate Circular Ø 1480mm	Standard Drop 1500mm	Components 170 ripples	Weight 41kg
--	--------------------------------	----------------------------------	-----------------------

LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 8 micro pendants totalling: 1800 Source lumens 21.6W. 90CRI 2700K
---	--





Spindrift 45

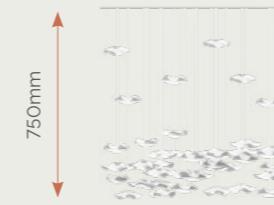

Spindrift 80

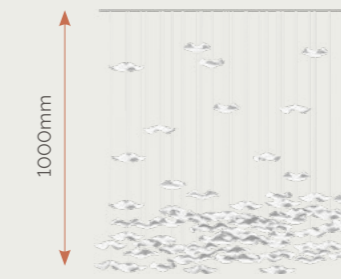

Spindrift 170

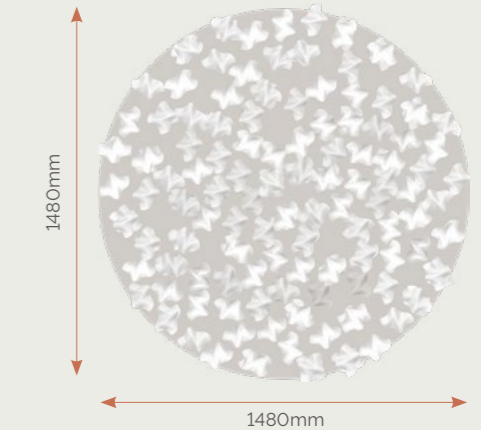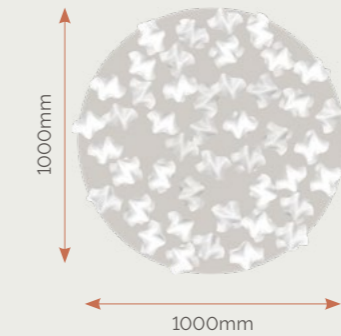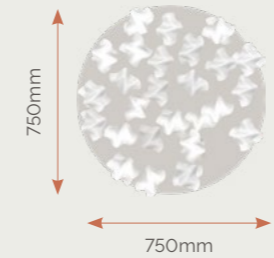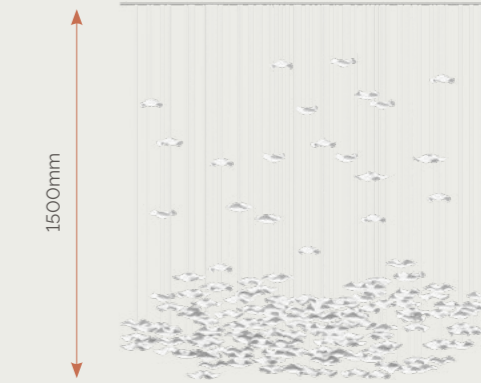


Sand & Sea

Spindrift 75

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---


Ceiling Plate Oval 1500mm x 500mm	Standard Drop 750mm	Components 75 ripples	Weight 15kg
--	-------------------------------	---------------------------------	-----------------------

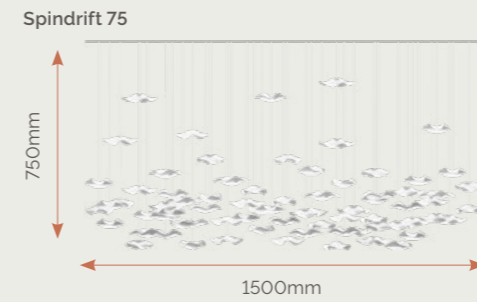

Spindrift 130

LED Light Source 3 ceiling recessed downlights totalling 1992 Source lumens 276 W 90CRI 2700K	or 4 micro pendants totalling: 900 Source lumens 10.8W. 90CRI 2700K
--	---

Ceiling Plate Oval 2000mm x 650mm	Standard Drop 1000mm	Components 130 ripples	Weight 26kg
--	--------------------------------	----------------------------------	-----------------------


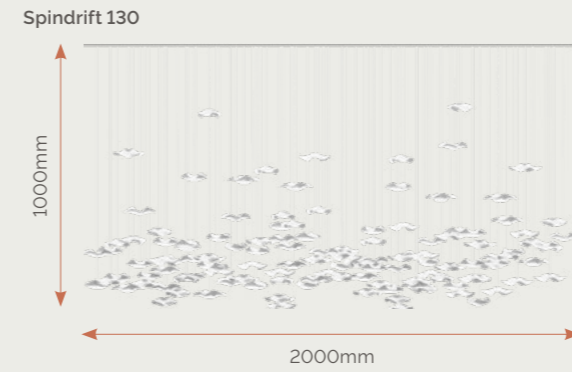


Spindrift 300

LED Light Source 4 ceiling recessed downlights totalling 2656 Source lumens 36.8 W 90CRI 2700K	or 6 micro pendants totalling: 1350 Source lumens 16.2W. 90CRI 2700K
---	--


Ceiling Plate Oval 2980mm x 1000mm	Standard Drop 1500mm	Components 300 ripples	Weight 60kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source 5 ceiling recessed downlights totalling 3320 Source lumens 46 W 90CRI 2700K	or 8 micro pendants totalling: 1800 Source lumens 21.6W. 90CRI 2700K
---	--

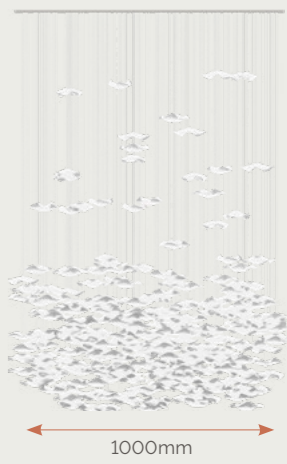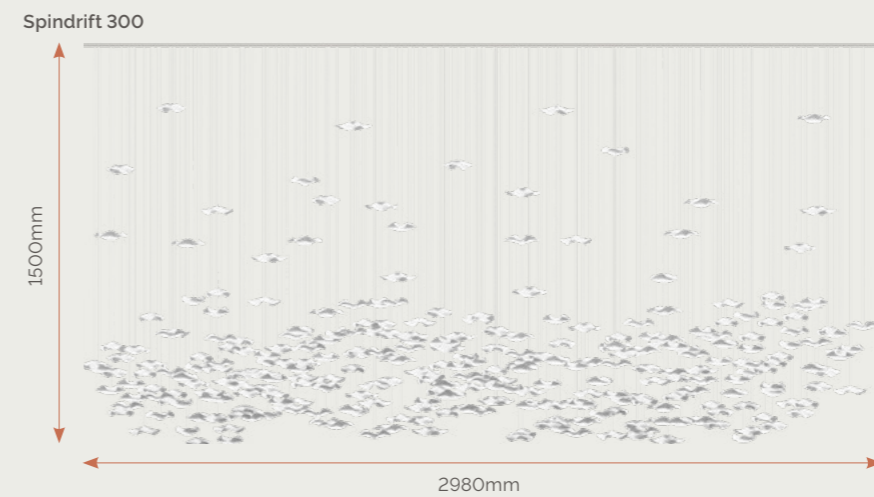

Skies

Celebrating the ever
shifting hues drifting
above

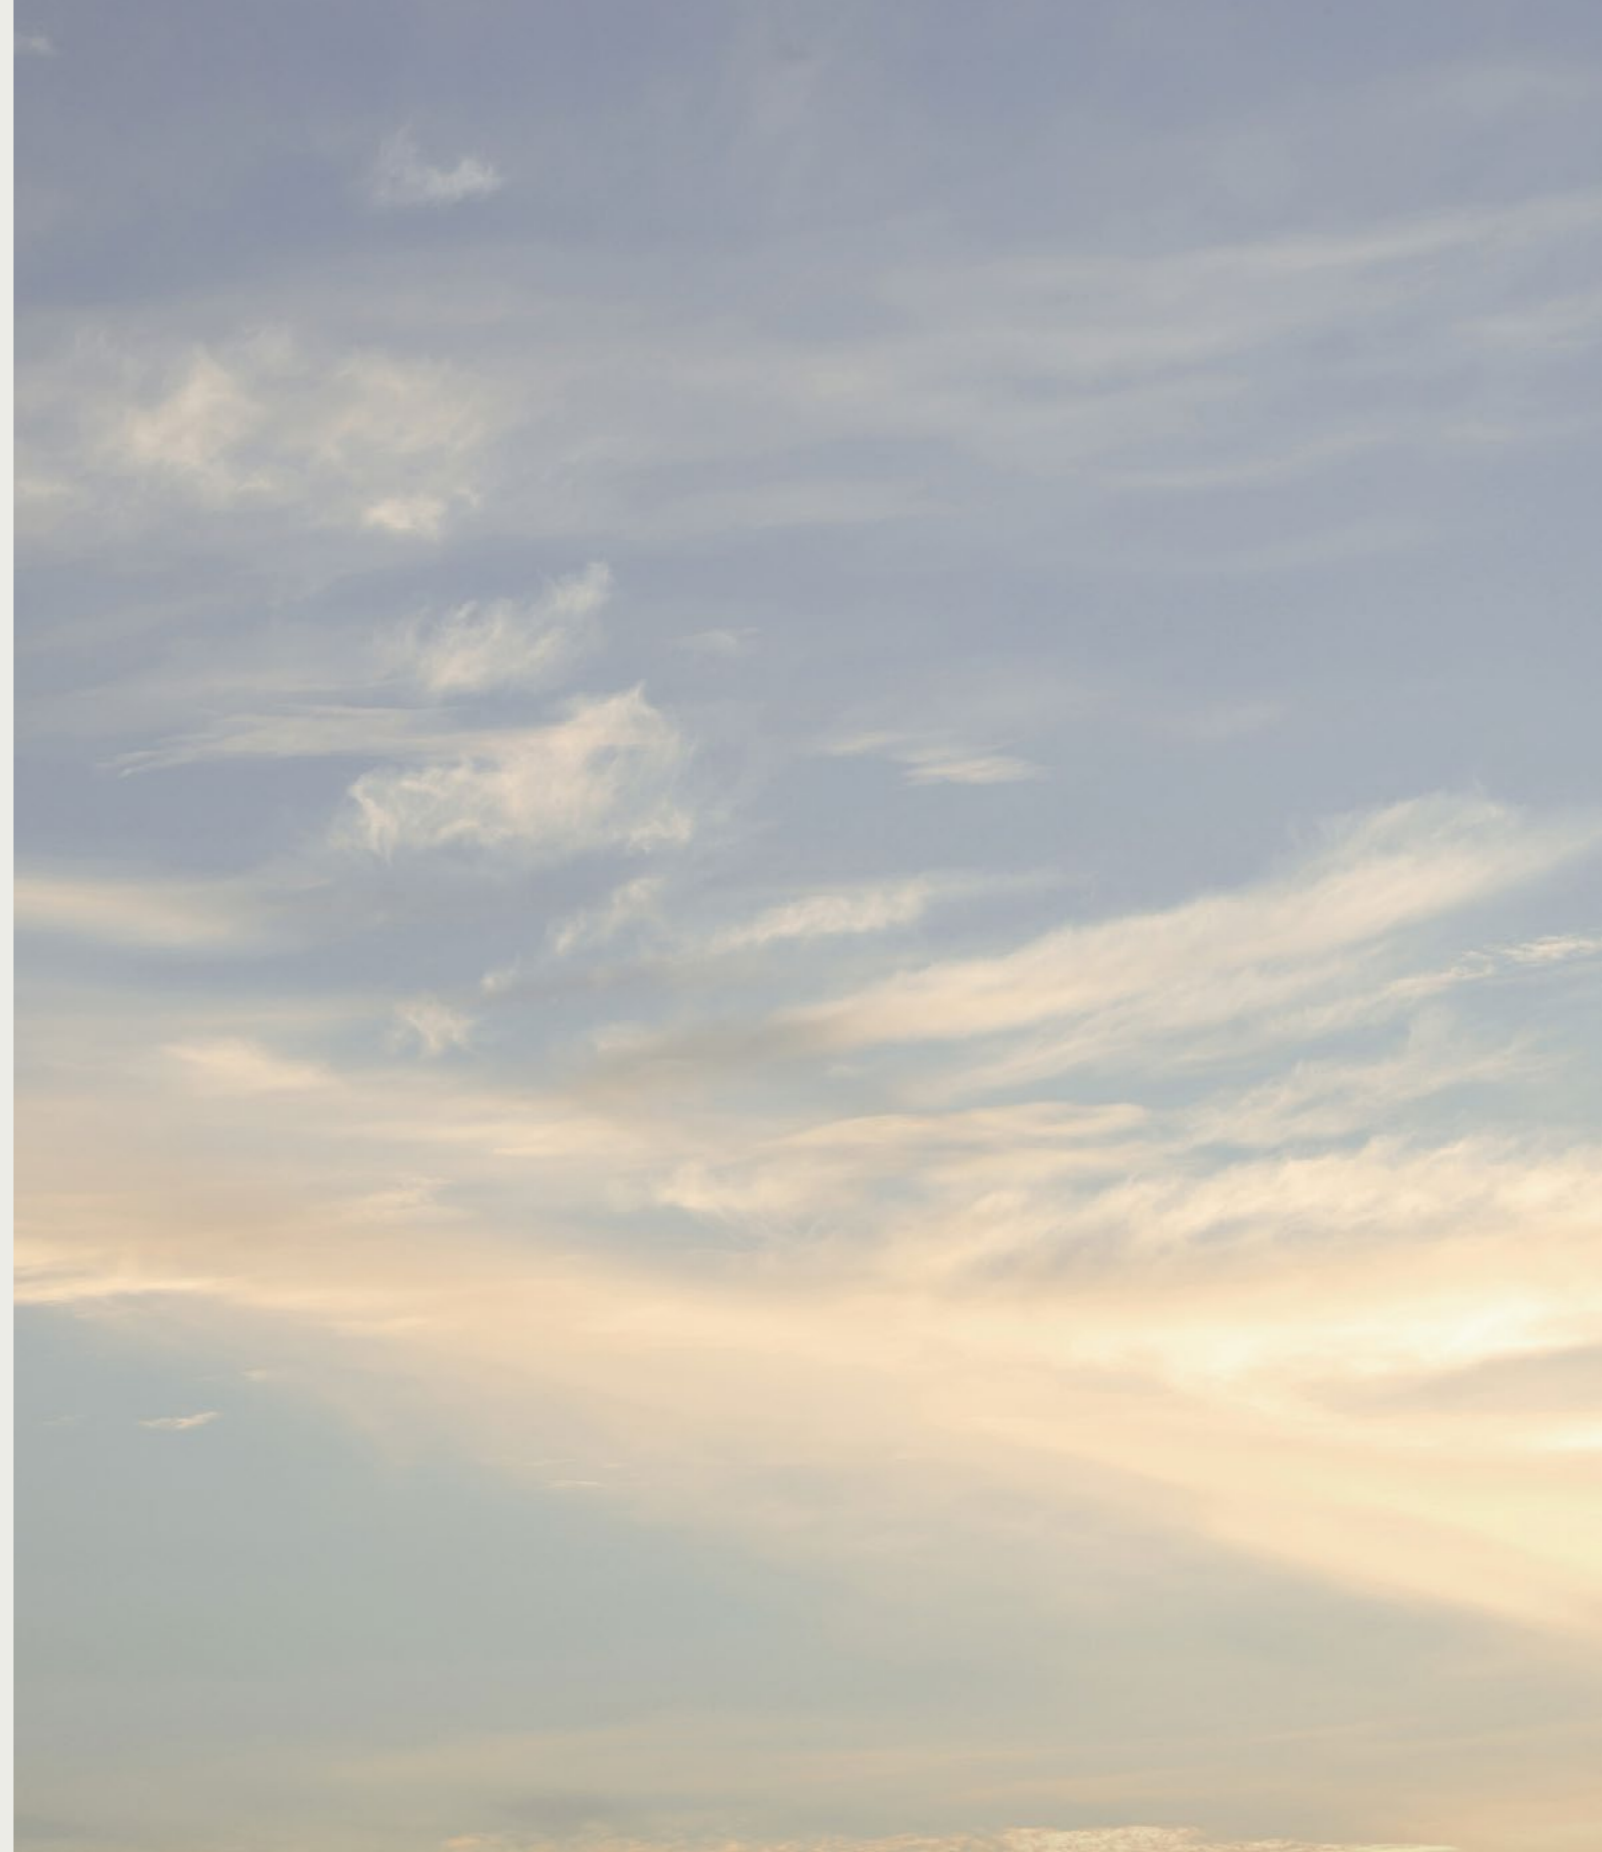



Skies

Billow details

- A** The billows are moulded in specialist float glass. The billow shapes are mirrored along the centre of each composition
- B** 0.6mm diameter steel cables suspend the billows in air almost invisibly.
- C** Cables are attached to the billows using specially designed threaded brass fixings.

Cables are attached to the ceiling using either:

- a 3mm deep surface mounted ceiling plate
- 14mm diameter individual micro ceiling roses



Compositions are lit using a combination of:

- Downlights positioned within the footprint of the composition
- Linear pendants suspended within the body of the composition

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate

Shape A

Shape B

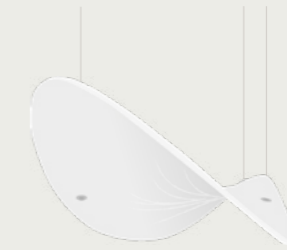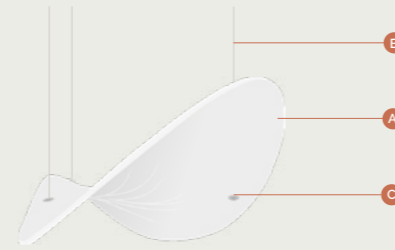

Skies Finishes

Glass billows are produced by hand. Variances in colour / finish / texture / size are part of the inherent character of the product.

Each billow contains a polished face & a matt face. The matt face is always installed facing upwards.

Billows



Opalescent Glass
Finish Ref: BOP



Clear Glass
Finish Ref: BCL

Fixings



Brushed/Satin Nickel
Finish Ref: NBF



Silver Cable
0.6mm microfine

Cables



Brushed/Satin Gold
Finish Ref: GBF



Gold Cable
0.6mm microfine

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016

Skies

Drift

Composition
Drift 50

Components
50 Billows

Component Fixings
Brushed nickel fixings
on silver coloured
microfine cable

Ceiling Fixing
Individual micro
ceiling roses

Dimensions
2980mm x 1200mm
x drop 1500mm

Lighting
6 downlights
9 linear pendants




Skies

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Drift 16

Ceiling Plate Oval 1500mm x 600mm	Standard Drop 750mm	Components 16 billows	Weight 16kg
--	-------------------------------	---------------------------------	-----------------------

Drift 16






LED Light Source 3 ceiling recessed downlights totalling 1992 source lumens 276W power 90 CRI 2700K CCT	and 4 linear pendants totalling: 2520 source lumens 32W power 90CRI 2700K CCT
--	---

Drift 36

Ceiling Plate Oval 2000mm x 1000mm	Standard Drop 1000mm	Components 36 billows	Weight 36kg
---	--------------------------------	---------------------------------	-----------------------

Drift 36

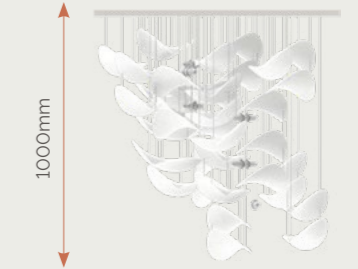



LED Light Source 5 ceiling recessed downlights totalling 3320 source lumens 46W power 90 CRI 2700K CCT	and 6 linear pendants totalling: 3780 source lumens 48W power 90CRI 2700K CCT
---	---

Drift 50

Ceiling Plate Oval 2980mm x 1200mm	Standard Drop 1500mm	Components 50 billows	Weight 51kg
---	--------------------------------	---------------------------------	-----------------------

Drift 50

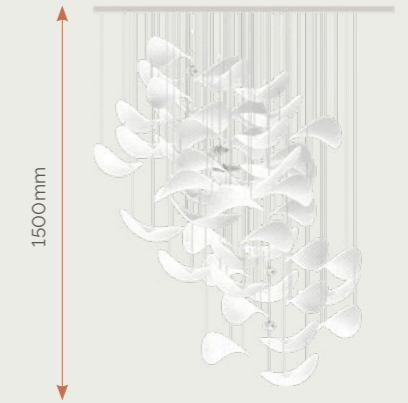

LED Light Source 6 ceiling recessed downlights totalling 3984 source lumens 55.2W power 90 CRI 2700K CCT	and 9 linear pendants totalling: 5670 source lumens 72W power 90CRI 2700K CCT
---	---

Skies

Wisp

Composition
Wisp 50

Components
50 Billows

Component Fixings
Brushed nickel fixings
on silver coloured
microfine cable

Dimensions
Ø 1150mm x drop
5000mm

Lighting
4 downlights
12 linear pendants





Skies

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Wisp 8




Ceiling Plate Circular Ø 750mm	Standard Drop 750mm	Components 8 billows	Weight 8kg
---	-------------------------------	--------------------------------	----------------------

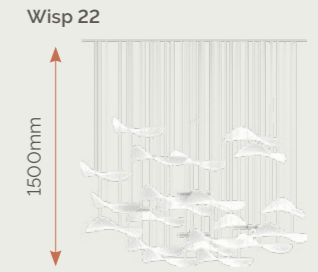

LED Light Source 1 ceiling recessed downlights totalling 664 source lumens 9.2W power 90 CRI 2700K CCT	and 2 linear pendants totalling: 1260 source lumens 16W power 90CRI 2700K CCT
---	--

Wisp 14

Ceiling Plate Circular Ø 1000mm	Standard Drop 1000mm	Components 14 billows	Weight 14kg
--	--------------------------------	---------------------------------	-----------------------

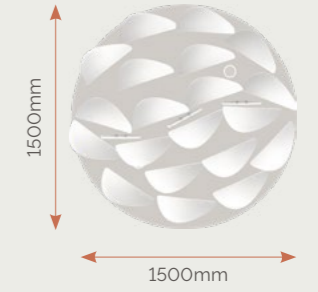

LED Light Source 3 ceiling recessed downlights totalling 1992 source lumens 27.6W power 90 CRI 2700K CCT	and 3 linear pendants totalling: 1890 source lumens 24W power 90CRI 2700K CCT
---	--

Wisp 22

Ceiling Plate Circular Ø 1480mm	Standard Drop 1480mm	Components 22 billows	Weight 22kg
--	--------------------------------	---------------------------------	-----------------------

LED Light Source 4 ceiling recessed downlights totalling 2656 source lumens 36.8W power 90 CRI 2700K CCT	and 4 linear pendants totalling: 2520 source lumens 32W power 90CRI 2700K CCT
---	--

Skies

Wisp 50

Wisp 76

Wisp 100

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard Local within void above piece on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 3mm plate as standard. Individual Ø 14mm micro ceiling roses on request
--	--	------------------------------	---

Ceiling Plate Circular Ø 1150mm	Standard Drop 5000mm	Components 50 billows	Weight 31kg
--	--------------------------------	---------------------------------	-----------------------






LED Light Source 4 ceiling recessed downlights totalling 2656 source lumens 36.8W power 90 CRI 2700K CCT	and 12 linear pendants totalling: 7560 source lumens 96W power 90CRI 2700K CCT
---	---

Ceiling Plate Circular Ø 1480mm	Standard Drop 6500mm	Components 76 billows	Weight 49kg
--	--------------------------------	---------------------------------	-----------------------

LED Light Source 5 ceiling recessed downlights totalling 3320 source lumens 46W power 90 CRI 2700K CCT	and 16 linear pendants totalling: 10080 source lumens 128W power 90CRI 2700K CCT
---	---

Ceiling Plate Circular Ø 2000mm	Standard Drop 8000mm	Components 100 billows	Weight 71kg
--	--------------------------------	----------------------------------	-----------------------



LED Light Source 6 ceiling recessed downlights totalling 3984 source lumens 55.2W power 90 CRI 2700K CCT	and 20 linear pendants totalling: 12600 source lumens 160W power 90CRI 2700K CCT
---	---

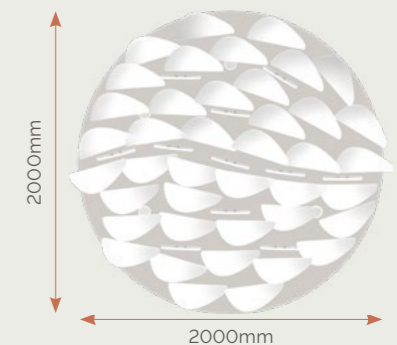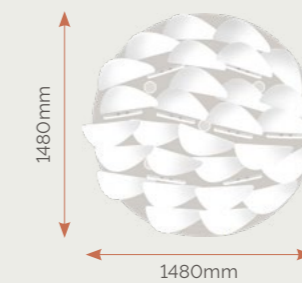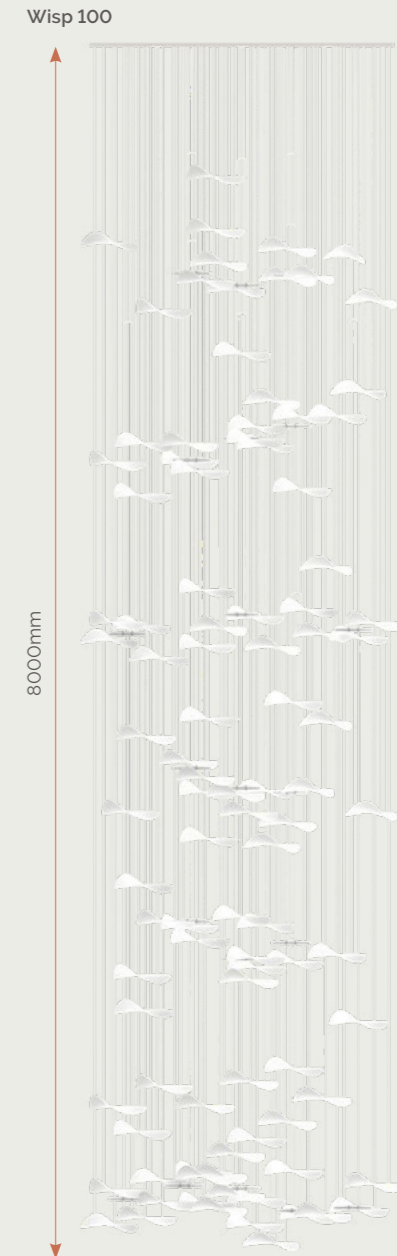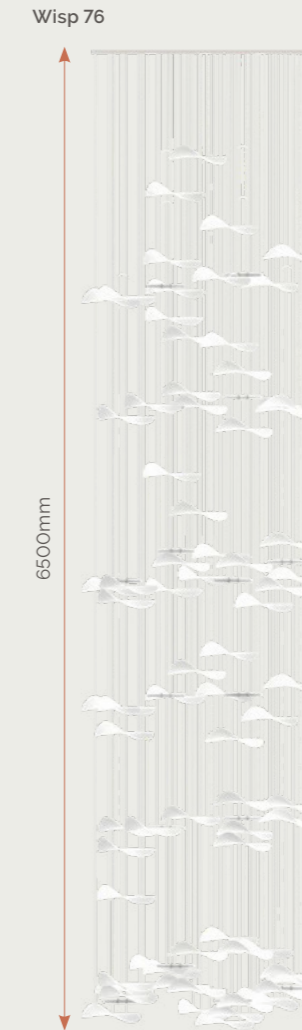



Summer Meadow

Celebrating the
season's energetic
abundance

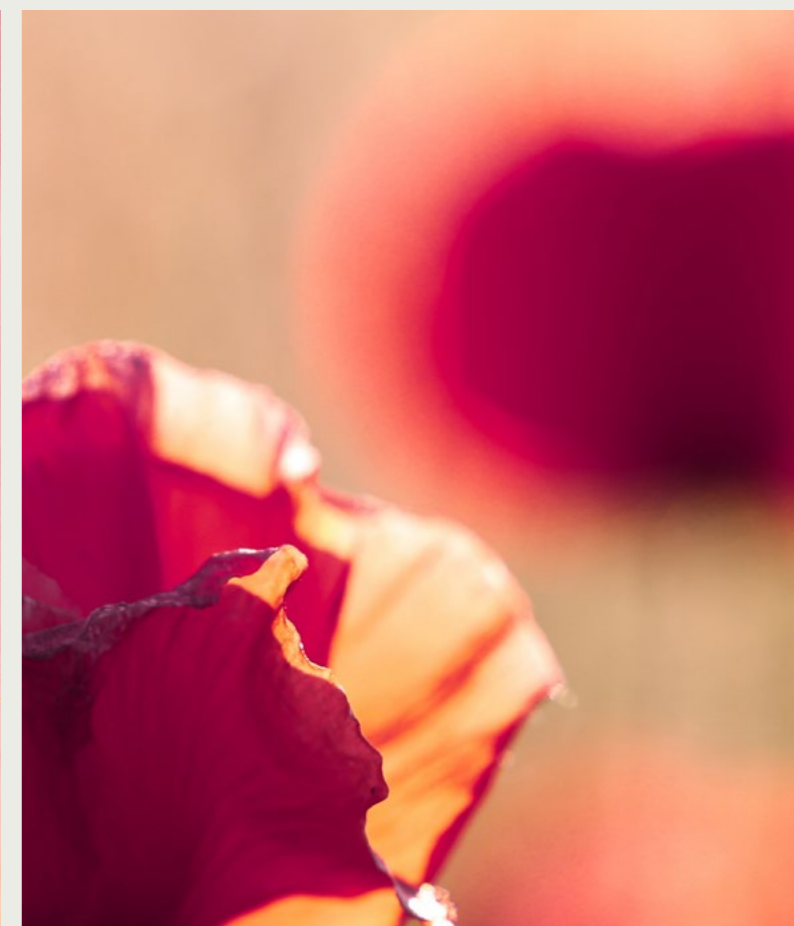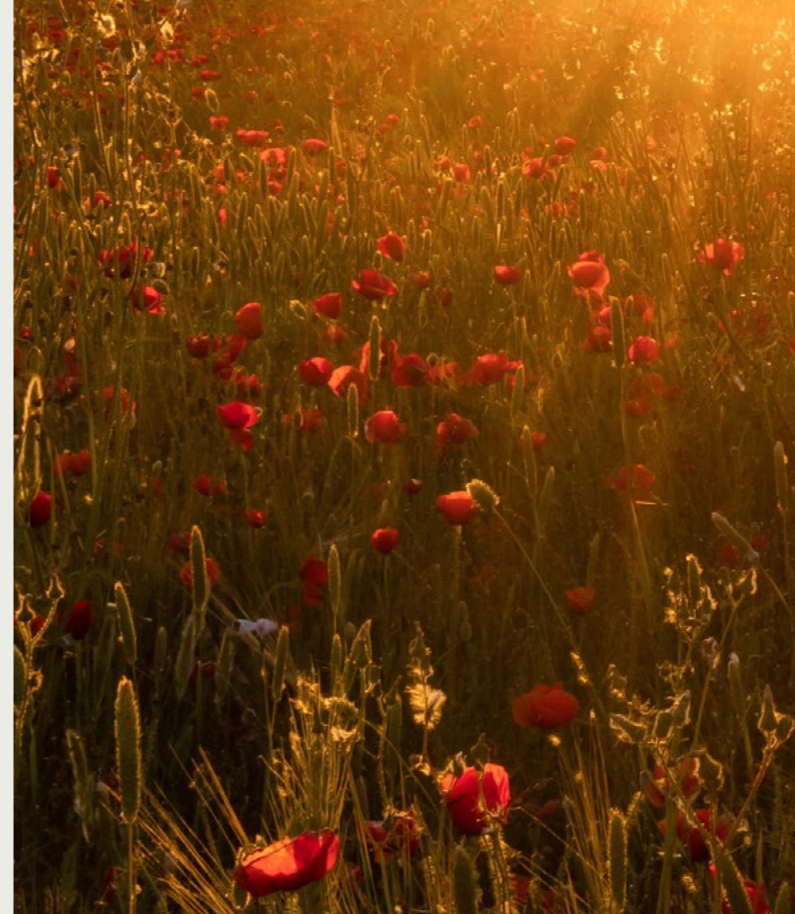



Summer Meadow

Component details

- C** Petals are moulded in specialist float glass in 4 sizes/shapes
- B** Each petal is held in place with a miniature metal stud
- A** The stems are cast in aluminium and coated in the chosen metal before being polished or patinated by hand



Height adjustable 0.5mm diameter steel cables power & suspend the stems in air almost invisibly.

Power cables are attached to the ceiling using 130mm diameter ceiling roses

Larger compositions are fixed in place using additional 0.5mm diameter steel cables on .micro ceiling roses

The compositions are lit using custom replaceable LED boards beneath each petal

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate

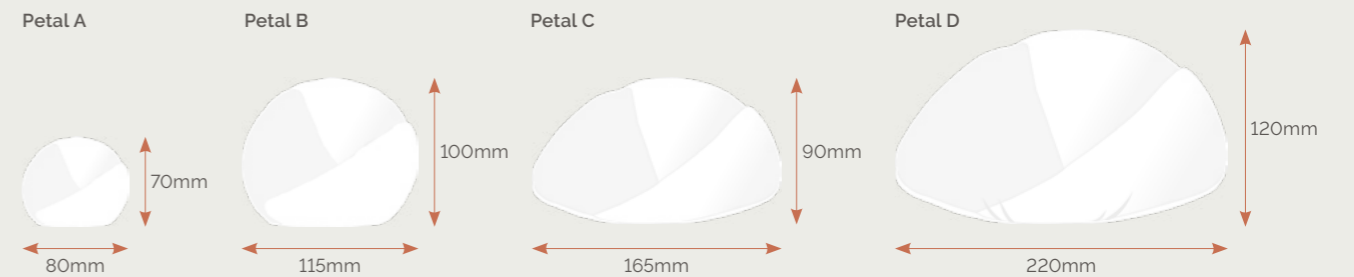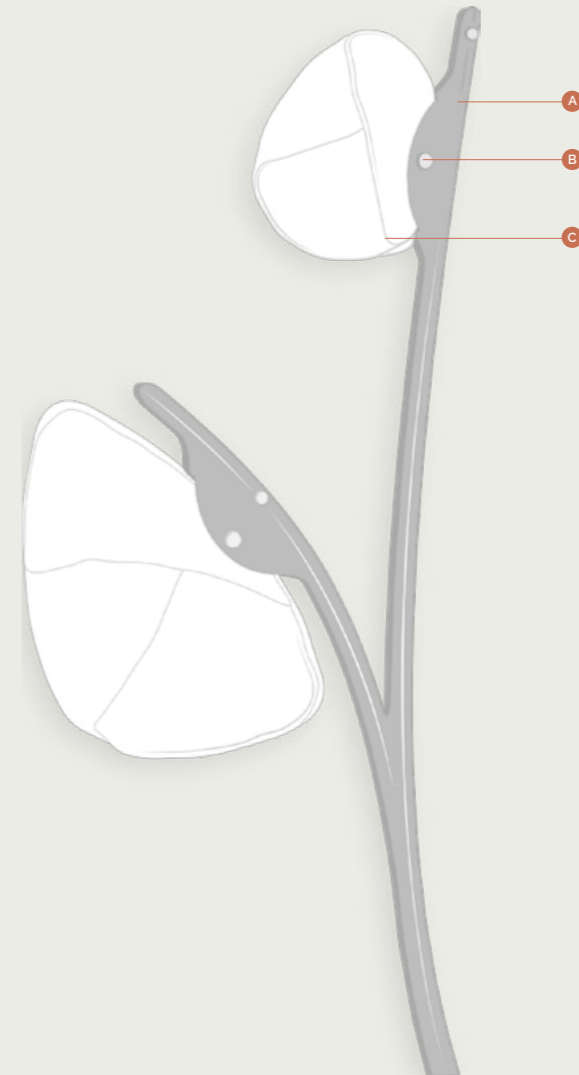

Summer Meadow Finishes

Glass petals & metal stems are produced by hand. Variances in colour / finish / texture are part of the inherent character of the product.



White
Finish Ref: PWP

Frames



Lightly Polished Light
Bronze
Finish Ref: BL



Lightly Polished Nickel
Finish Ref: NL



Patinated Brass
Finish Ref: BP



Patinated Silver
Finish Ref: SP

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016



Silver
1.4mm fine

Summer Meadow

Horizontal Loops

Composition
Horizontal Loop 34

Components
34 white petals on
light bronze loop
stems

Component Fixings
Light bronze studs

Ceiling Fixing
Surface mounted
rose with fine silver
coloured cable

Dimensions
2280mm x 1380mm x
drop 1170mm

Lighting
34 custom LED
boards



Summer Meadow


Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard. Local within void above piece on request	Voltage 110 - 240V	Certification CE
--	---	------------------------------	----------------------------

Horizontal Loop 22

Footprint Linear 1150mm x 650mm	Drop Adjustable: min. 940mm to max. 3400mm	Components 22 Petals	Weight 6kg
--	---	--------------------------------	----------------------

LED Light Source
22 custom LED boards totalling 2860 Source lumens
33W
90CRI
2700K

Horizontal Loop 22

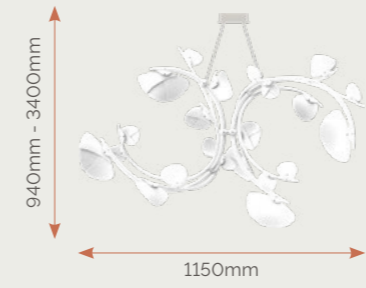

Horizontal Loop 24

Footprint Linear 1550mm x 500mm	Drop Adjustable: min. 940mm to max. 3400mm	Components 24 Petals	Weight 7kg
--	---	--------------------------------	----------------------

LED Light Source
24 custom LED boards totalling 3120 Source lumens
36W
90CRI
2700K

Horizontal Loop 24



Horizontal Loop 34

Footprint Linear 2280mm x 1380mm	Drop Adjustable: min. 1170mm to max. 3600mm	Components 34 Petals	Weight 11kg
---	--	--------------------------------	-----------------------

LED Light Source
34 custom LED boards totalling 4420 Source lumens
51W
90CRI
2700K

Horizontal Loop 34



Summer Meadow

Vertical Loops

Composition
Vertical Loop 37

Components
37 white petals on
light bronze loop
stems

Component Fixings
Light bronze studs

Ceiling Fixing
Ceiling recessed
rose with fine silver
coloured cable

Dimensions
1080mm x 730mm x
drop 2820mm

Lighting
37 custom LED
boards



Summer Meadow

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard. Local within void above piece on request	Voltage 110 - 240V	Certification CE
--	---	------------------------------	----------------------------

Vertical Loop 22

Footprint Linear 700mm x 500mm	Drop Adjustable: min. 1455mm to max.4000mm	Components 22 Petals	Weight 6kg
---	---	--------------------------------	----------------------

LED Light Source

22 custom LED boards totalling
2860 Source lumens
33W
90CRI
2700K

Vertical Loop 22



Vertical Loop 24



Vertical Loop 37



Vertical Loop 24

Footprint Linear 700mm x 650mm	Drop Adjustable: min. 1980mm to max. 4530mm	Components 24 Petals	Weight 7kg
---	--	--------------------------------	----------------------

LED Light Source

24 custom LED boards totalling
3120 Source lumens
36W
90CRI
2700K



Vertical Loop 37

Footprint Linear 730mm x 1080mm	Drop Adjustable: min.2820mm to max.4800	Components 37 Petals	Weight 11kg
--	--	--------------------------------	-----------------------

LED Light Source

37 custom LED boards totalling
4810 Source lumens
55.5W
90CRI
2700K





Approx Scale: 1:30



Spring Meadow

Celebrating the
season's quiet
optimism

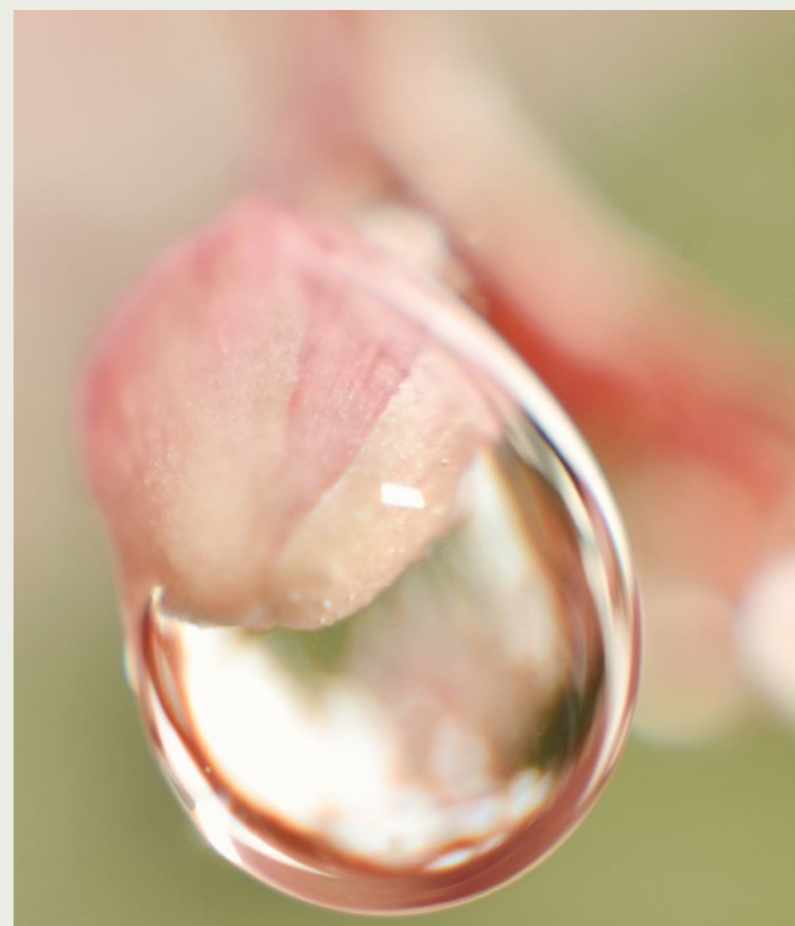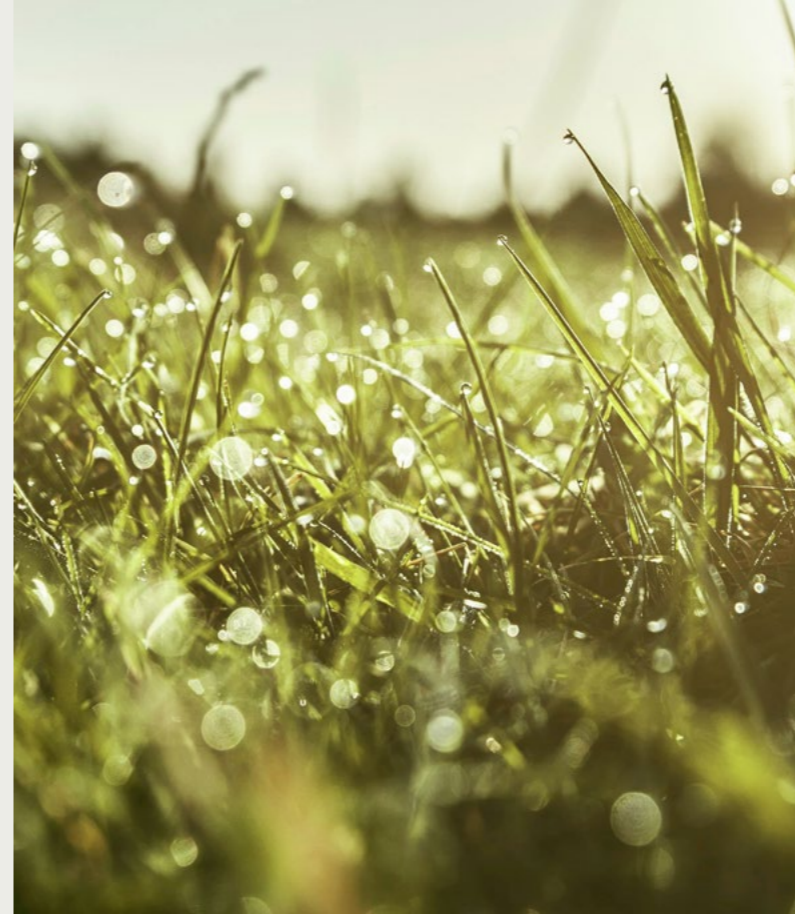



Spring Meadow

Component details

- A** Bud components are each hand blown in a variety of colours
- B** Dew components are hand worked in clear glass and set over the frame
- C** Each glass component is bonded to the inner frame and held in place with a miniature metal stud
- D** The stems are cast in aluminium and coated in the chosen metal before being polished or patinated by hand


Height adjustable 0.5mm diameter steel cables power & suspend the stems in air almost invisibly.

Power cables are attached to the ceiling using 130mm diameter ceiling roses

Larger compositions are fixed in place using additional 0.5mm diameter steel cables on .micro ceiling roses

The compositions are lit using custom replaceable LED boards beneath each bud / dew

Our design team can produce custom fixing / lighting solutions for locations where the standard methods are not appropriate

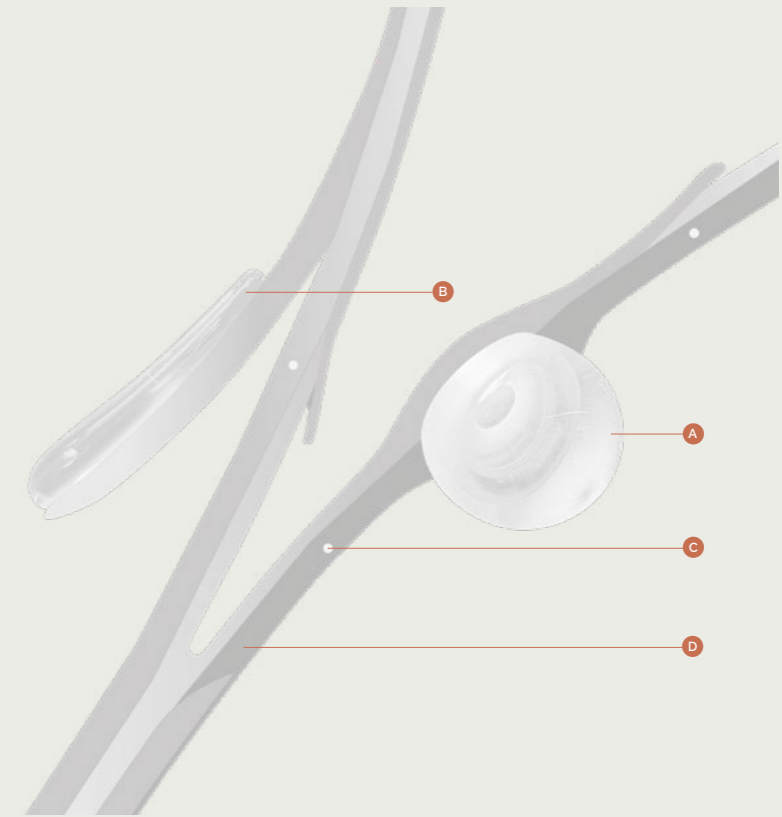

Bud

Dew



70mm

190mm



Approx Scale: 1:2

Spring Meadow Finishes

The glass dew / bud & metal stems components are produced by hand. Variances in colour / finish / texture / size / shape are part of the inherent character of the product.

Buds



White
Finish Ref: BWP



Pink
Finish Ref: BPP



Green
Finish Ref: BGP

Frames



Lightly Polished Light
Bronze
Finish Ref: BL



Lightly Polished Nickel
Finish Ref: NL



Patinated Brass
Finish Ref: BP



Patinated Silver
Finish Ref: SP

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016



Silver
1.4mm fine

Spring Meadow

Horizontal Shoots

Composition
Horizontal Shoot 14

Components
8 buds and 6 dews
on ligly polished
nickel shoot stems

Component Fixings
Nickel studs

Ceiling Fixing
Surface mounted
rose with fine silver
coloured cable

Dimensions
2180mm x 900mm x
drop 1250mm

Lighting
14 custom LED
boards



Spring Meadow

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard. Local within void above piece on request	Voltage 110 - 240V	Certification CE
--	---	------------------------------	----------------------------

Horizontal Shoot 7

Footprint Linear 1460mm x 600mm	Drop Adjustable: min. 1020mm to max. 3500mm	Components 4 buds and 3 dew	Weight 4kg
--	--	---------------------------------------	----------------------

LED Light Source
7 custom LED boards totalling 920 Source lumens
12W
90CRI
2700K

Horizontal Shoot 7



Horizontal Shoot 14

Footprint Linear 2180mm x 900mm	Drop Adjustable: min. 1040mm to max. 3540mm	Components 8 buds and 6 dew	Weight 8kg
--	--	---------------------------------------	----------------------

LED Light Source
14 custom LED boards totalling 1840 Source lumens
24W
90CRI
2700K

Horizontal Shoot 14



Horizontal Shoot 18

Footprint Linear 2850mm x 1070mm	Drop Adjustable: min. 1180mm to max. 3750mm	Components 10 buds and 8 dew	Weight 10kg
---	--	--	-----------------------

LED Light Source
18 custom LED boards totalling 2300 Source lumens
30W
90CRI
2700K

Horizontal Shoot 18



Approx Scale: 1:30

Spring Meadow

Vertical Shoots

Composition
Spring Meadow
Horizontal Shoot 14

Components
8 buds, 6 dews on
lightly polished
nickel shoot stems

Component Fixings
Nickel studs

Ceiling Fixing
Surface mounted
rose with fine silver
coloured cable

Dimensions
980mm (width) x
940mm (depth) x
2160mm (drop)

Lighting
14 custom LED
boards



Spring Meadow


Dimming Phase dimming as standard 0-10V/DALI on request	Driver Installation Remote as standard. Local within void above piece on request	Voltage 110 - 240V	Certification CE
--	---	------------------------------	----------------------------

Vertical Shoot 7

Footprint Linear 760mm x 770mm	Drop Adjustable: min. 1445mm to max. 3900mm	Components 4 buds and 3 dew	Weight 4kg
---	--	---------------------------------------	----------------------

LED Light Source
7 custom LED boards totalling
920 Source lumens
12W
90CRI
2700K

Vertical Shoot 7

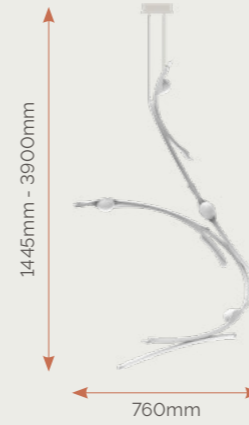

Vertical Shoot 14




Vertical Shoot 18



Vertical Shoot 14

Footprint Linear 980mm x 940mm	Drop Adjustable: min. 2350mm to max. 4800mm	Components 8 buds and 6 dew	Weight 8kg
---	--	---------------------------------------	----------------------

LED Light Source
14 custom LED boards totalling
1840 Source lumens
24W
90CRI
2700K

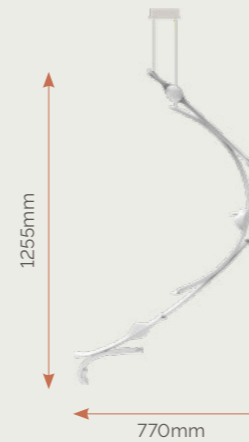

Vertical Shoot 18

Footprint Linear 940mm x 1015mm	Drop Adjustable: min. 3070mm to max. 5550mm	Components 10 buds and 8 dew	Weight 10kg
--	--	--	-----------------------

LED Light Source
18 custom LED boards totalling
2300 Source lumens
30W
90CRI
2700K

1015mm
Approx Scale: 1:30



Crystalline

Discovering the
emergence of crystals
from rugged geode
formations





Crystalline

Crystal details

B C Caps & LED hubs are produced in aluminium and coated in textured metal to resemble the rocky outer surface of a geode.

A 4mm diameter braided cables power and suspend the buds from the ceiling

Cables are attached to the crystals using specially designed threaded aluminium hubs

Cables are attached to the ceiling using either:

- a 50mm deep surface mounted ceiling plate
- 40mm diameter individual ceiling roses

E The outer glass form is blown by hand into a mould

D The inner faceted crystal is polished to transmit light through the entire component.

Rose quartz coloured filters can be applied on request to 30% of the LEDs to create pockets of colour within the compositions.



Our design team can produce custom fixing solutions for locations where the standard methods are not appropriate



Elevation A



Elevation B

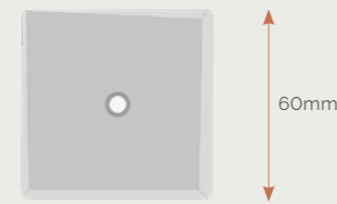

Top



Underside (Varies)

Crystalline Finishes

The cap & glass components are produced by hand. Variance in colour / finish / texture / shape / size are part of the inherent character of the product.

Caps



Patinated Brass
Finish Ref: CBP



Dull Nickel
Finish Ref: CND



Patinated Silver
Finish Ref: CSP

Cables



Nugget Gold
4mm braided



Elephant Grey
4mm braided

Ceiling Fixings



Powdercoat Aluminium
Traffic White RAL 9016

Crystalline

Formation

Composition
Formation 100

Components
100 crystals with
patinated brass caps

Component Fixings
Nugget braided
cable

Ceiling Fixing
Individual roses

Dimensions
3500mm x 700mm x
drop 1500mm

Lighting
100 custom LED
boards




Crystalline

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---



Formation 30

Ceiling Plate Rectangular 1500mm x 500mm	Standard Drop 600mm	Components 30 Crystals	Weight 53kg
---	-------------------------------	----------------------------------	-----------------------

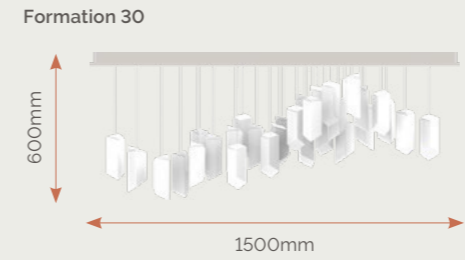


Formation 50

LED Light Source 30 custom LED boards, totalling: 6900 Source lumens 90 W 95CRI 2700K	Standard Drop 1000mm	Components 50 Crystals	Weight 87kg
Ceiling Plate Rectangular 2100mm x 600mm			

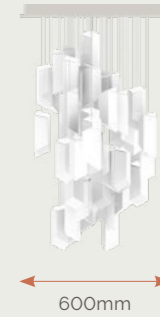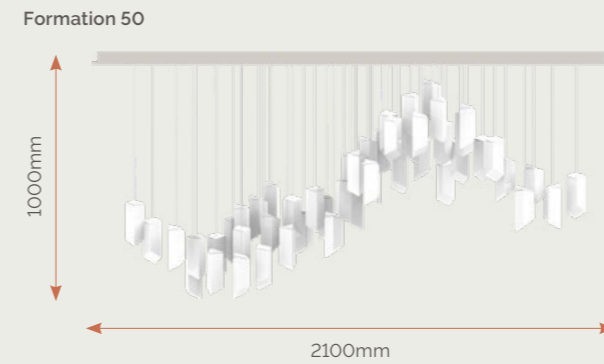

Formation 100

LED Light Source 50 custom LED boards, totalling: 11500 Source lumens 150 W 95CRI 2700K	Standard Drop 1500mm	Components 100 Crystals	Weight 173kg
Ceiling Plate Rectangular 3500mm x 700mm			
LED Light Source 100 custom LED boards, totalling: 23000 Source lumens 300 W 95CRI 2700K			

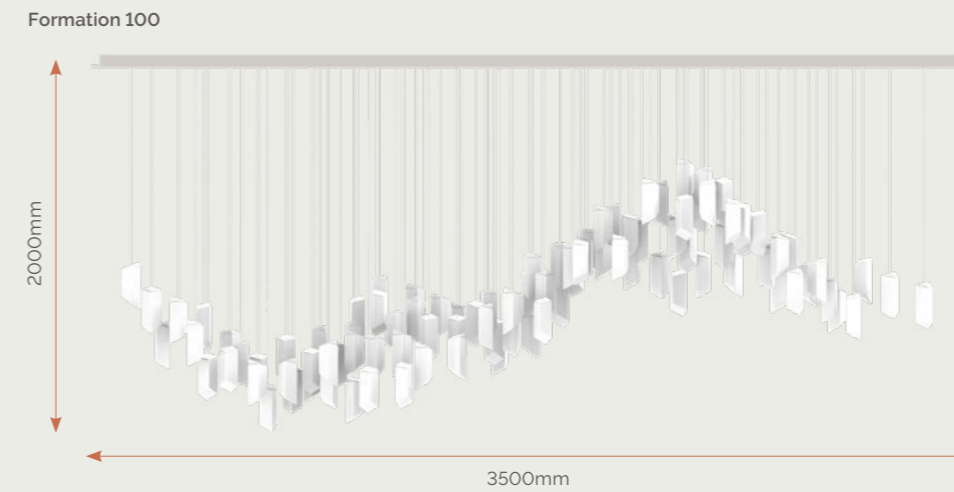

Crystalline

Radiance

Composition
Radiance 35

Components
35 crystals with
patinated silver caps

Component Fixings
Elephant grey
braided cable

Ceiling Fixing
Surface mounted
plate

Dimensions
1800mm x 600mm x
drop 600mm

Lighting
35 custom LED
boards




Crystalline

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Radiance 15

Ceiling Plate Oval 900mm x 300mm	Standard Drop 600mm	Components 15 Crystals	Weight 22kg
---	-------------------------------	----------------------------------	-----------------------

Raidance 15

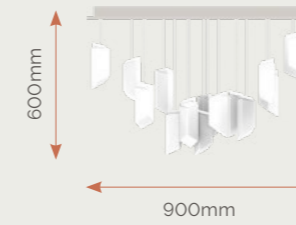


LED Light Source

15 custom LED boards, totalling:
3450 Source lumens
45W
95CRI
2700K

Radiance 25

Ceiling Plate Oval 1350mm x 450mm	Standard Drop 800mm	Components 25 Crystals	Weight 36kg
--	-------------------------------	----------------------------------	-----------------------

Raidance 25

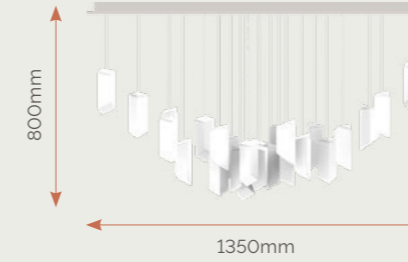


LED Light Source

25 custom LED boards, totalling:
5750 Source lumens
75W
95CRI
2700K

Radiance 35

Ceiling Plate Circular 1800mm x 600mm	Standard Drop 1000mm	Components 35 Crystals	Weight 64kg
--	--------------------------------	----------------------------------	-----------------------

Raidance 35

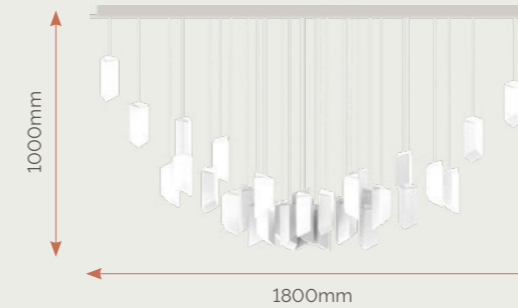

LED Light Source

35 custom LED boards, totalling:
8050 Source lumens
105 W
95CRI
2700K

Crystalline

Cluster

Composition
Cluster 75

Components
75 crystals with
patinated silver caps

Component Fixings
Patinated silver caps
on elephant grey
braided cable

Ceiling Fixing
Surface mounted
plate

Dimensions
Ø 1150mm x drop
2000mm

Lighting
75 custom LED
boards



Crystalline

Cluster 52

Cluster 75

Cluster 110

Dimming Phase dimming as standard 0-10V/DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 40mm roses on request.
--	---	------------------------------	---

Ceiling Plate Circular Ø 800mm	Standard Drop 1500mm	Components 52 Crystals	Weight 76kg
---	--------------------------------	----------------------------------	-----------------------

LED Light Source
52 custom LED boards, totalling:
11960 Source lumens
156W
95CRI
2700K

Ceiling Plate Circular Ø 1150mm	Standard Drop 2000mm	Components 75 Crystals	Weight 118kg
--	--------------------------------	----------------------------------	------------------------

LED Light Source
75 custom LED boards, totalling:
17250 Source lumens
225W
95CRI
2700K


Ceiling Plate Circular Ø 1480mm	Standard Drop 3000mm	Components 110 Crystals	Weight 184kg
--	--------------------------------	-----------------------------------	------------------------

LED Light Source
110 custom LED boards, totalling:
25300 Source lumens
330W
95CRI
2700K





Cluster . 52



Cluster . 75

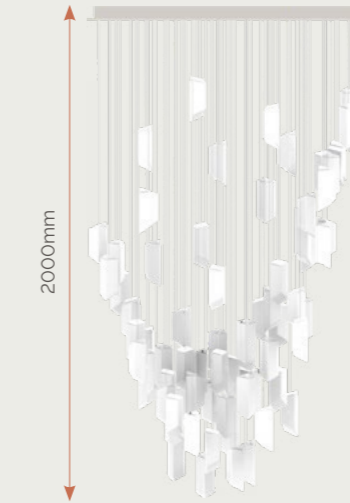

Cluster . 110

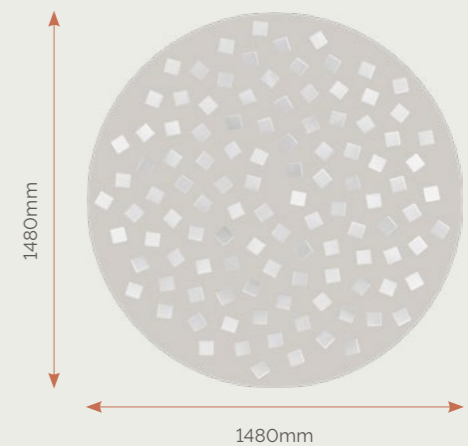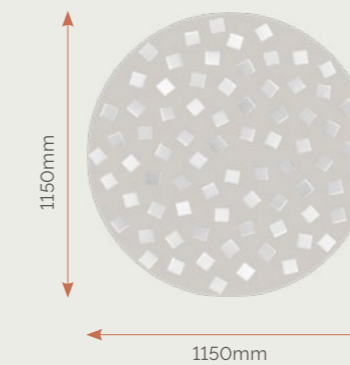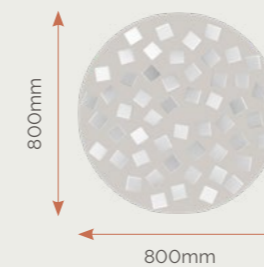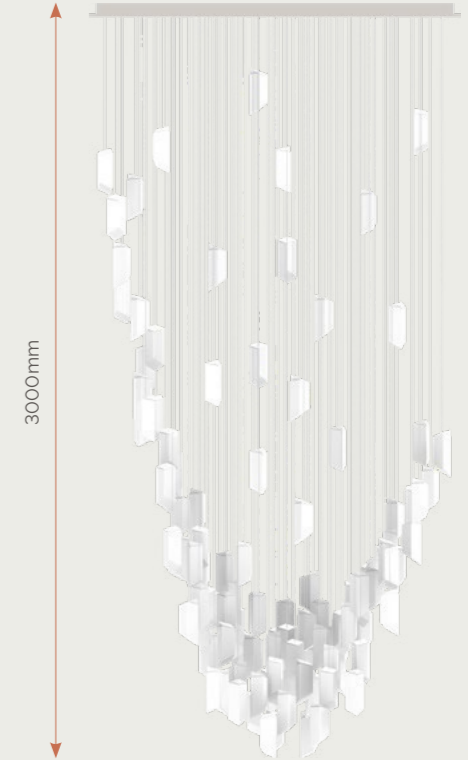



Flux

Capturing the
atmosphere of the city
in light and motion.






Flux

Tube details

- B E** Upper caps & lower caps are produced in aluminium and plated or coated in decorative metals
- A** 6mm diameter braided cables power and suspend the tubes from the ceiling
- Cables are attached to the tubes using specially designed threaded aluminium hubs
- Cables are attached to the ceiling using either:
 - a 50mm deep surface mounted ceiling plate
 - 40mm diameter individual ceiling roses
- C** The outer glass tubes are available in clear or frosted glass
- D** The inner acrylic tube diffuses the LEDs
- Our design team can produce custom fixing solutions for locations where the standard methods are not appropriate

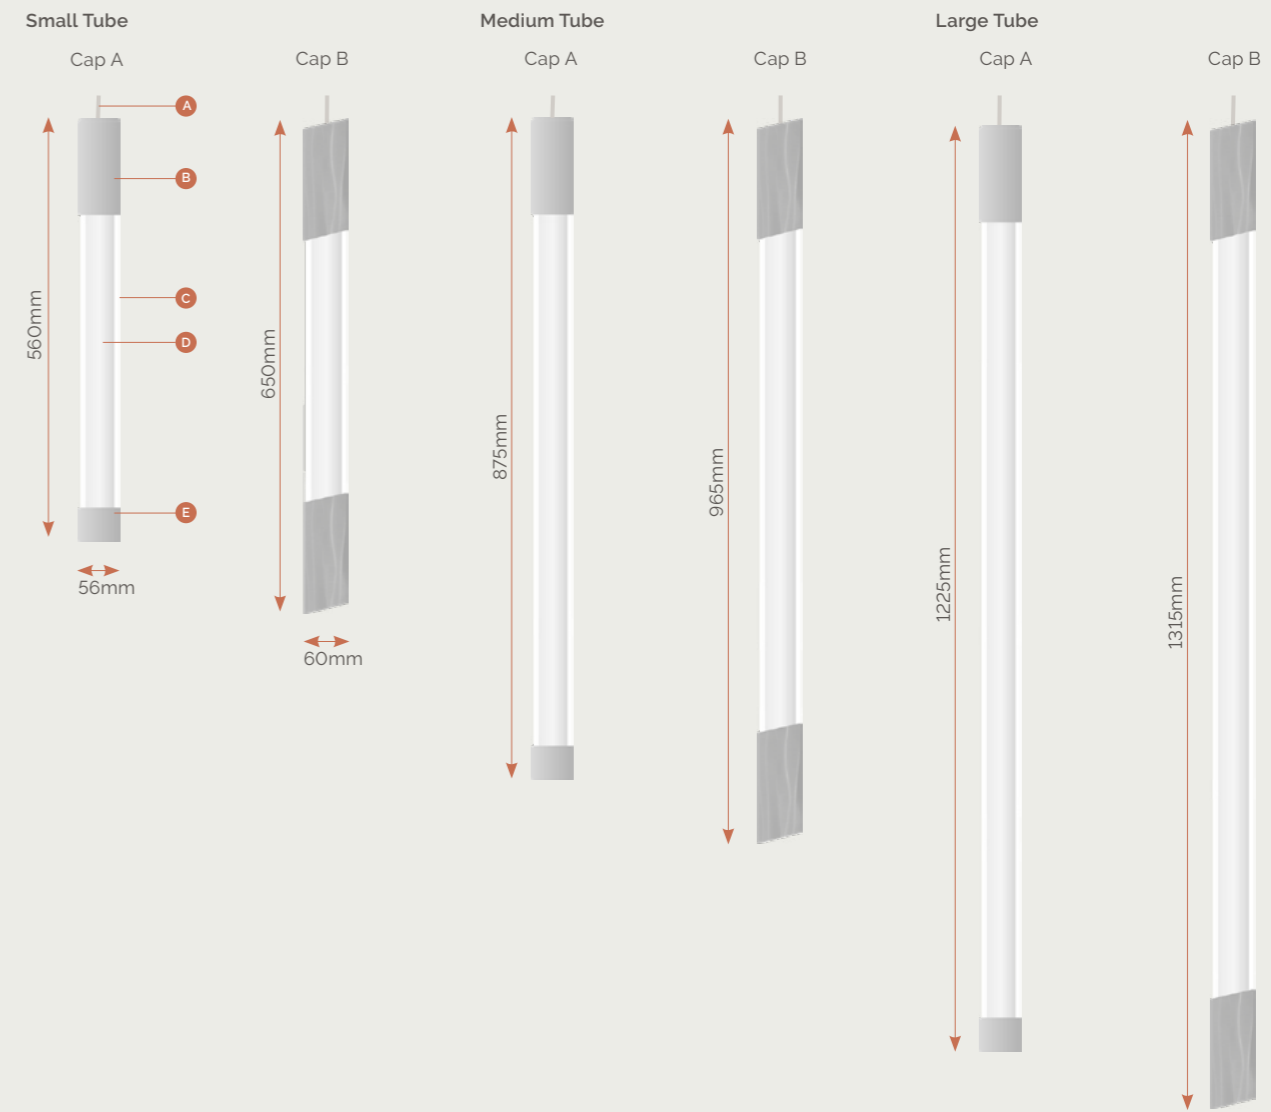

Flux Finishes

The cap & glass components are produced by hand.
Variances in colour / finish / texture are part of the inherent character of the product.

Unless otherwise specified, cable finish will be selected to align with the cap finish

Cap



Patinated Brushed Brass
Finish Ref: CBP



Brushed Nickel
Finish Ref: CNB



Brushed Black Nickel
Finish Ref: CBB



Polished Gold
Finish Ref: CGP



Polished Nickel
Finish Ref: CNP



Anodised Black
Finish Ref: CBA

Tube



Clear Glass
Finish Ref: CL



Frosted Glass
Finish Ref: FR

Cables



Nugget Gold
6mm braided



Light Grey
6mm braided



Elephant Grey
6mm braided



Satinwood Gold
6mm braided



Black
6mm braided

Cascade

Flux

Composition
Cascade 6

Components
6 tubes with
patinated brass end
cap B

Component Fixings
Nugget gold braided
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
Ø 400mm x drop
4000mm

Lighting
6 custom LED boards



Flux

Cascade 6

Cascade 8

Cascade 10

Dimming 0-10V as standard DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 60mm roses on request.
--	---	------------------------------	---

Ceiling Plate Circular Ø 400mm	Standard Drop 4000mm	Components 3 large tubes 3 medium tubes	Weight 19kg
--	--------------------------------	--	-----------------------

LED Light Source
6 custom LED boards, totalling:
11,100 Source lumens
183W
80CRI
2700K CCT


Ceiling Plate Circular Ø 500mm	Standard Drop 5500mm	Components 4 large tubes 4 medium tubes	Weight 25kg
--	--------------------------------	--	-----------------------

LED Light Source
8 custom LED boards, totalling:
14,800 Source lumens
244W
80CRI
2700K CCT


Ceiling Plate Circular Ø 600mm	Standard Drop 7000mm	Components 5 large tubes 5 medium tubes	Weight 32kg
--	--------------------------------	--	-----------------------

LED Light Source
10 custom LED boards, totalling:
18,500 Source lumens
305W
80CRI
2700K CCT


Cascade . 6



Cascade . 8



Cascade . 10



Flux

Helix

Composition
Helix 24

Components
24 tubes s with
patinated brass end
cap B

Component Fixings
Nugget gold braided
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
Ø 1050mm x drop
3500mm

Lighting
24 custom LED
boards



Flux

Dimming 0-10V as standard DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 60mm roses on request.
--	---	------------------------------	---

Helix 12

Ceiling Plate Circular Ø 800mm	Standard Drop 2500mm	Components 6 medium tubes 6 small tubes	Weight 37kg
--	--------------------------------	--	-----------------------

LED Light Source

12 custom LED boards, totalling:
13,800 Source lumens
240W
80CRI
2700K CCT


Helix . 12



Helix . 24



Helix . 30

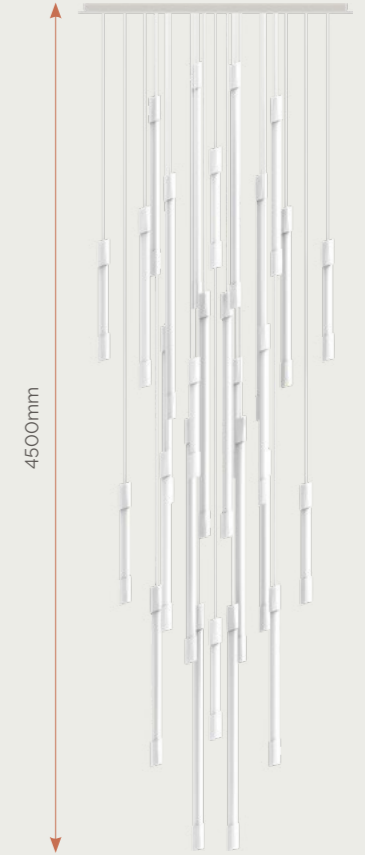

Helix 24

Ceiling Plate Circular Ø 1050mm	Standard Drop 3500mm	Components 8 large tubes 8 medium tubes 8 small tubes	Weight 62kg
---	--------------------------------	---	-----------------------

LED Light Source



24 custom LED boards, totalling:
36,000 Source lumens
608W
80CRI
2700K CCT

Helix 30

Ceiling Plate Circular Ø 1450mm	Standard Drop 4500mm	Components 10 large tubes 10 medium tubes 10 small tubes	Weight 89kg
---	--------------------------------	--	-----------------------

LED Light Source

30 custom LED boards, totalling:
45,000 Source lumens
760W
80CRI
2700K CCT

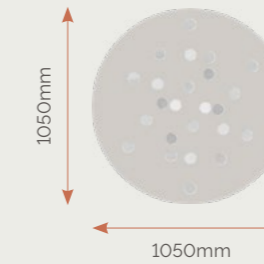

Flux

Veil

Composition
Veil 13

Components
13 tubes s with
patinated brass end
cap B

Component Fixings
Nugget gold braided
cable

Ceiling Fixing
Surface mounted
ceiling plate

Dimensions
2000mm x 600mm x
drop 2000mm

Lighting
13 custom LED
boards



Flux

Dimming 0-10V as standard DALI on request	Driver Location Local within ceiling plate as standard Remote on request	Voltage 110 - 240V	Ceiling Fixing Surface mounted (h) 50mm plate as standard. Individual Ø 60mm roses on request.
--	---	------------------------------	---

Veil 10

Ceiling Plate Rectangular 1500 x 500mm	Standard Drop 1500mm	Components 5 medium tubes 5 small tubes	Weight 40kg
---	--------------------------------	--	-----------------------

Veil 10



Veil 13

LED Light Source 10 custom LED boards, totalling: 11,500 Source lumens 200 W 80CRI 2700K CCT	Ceiling Plate Rectangular 2000mm x 600mm	Standard Drop 2000mm	Components 7 medium tubes 6 small tubes	Weight 59kg
--	---	--------------------------------	--	-----------------------

Veil 13



Veil 15

LED Light Source 13 custom LED boards, totalling: 15,300 Source lumens 265 W 80CRI 2700K CCT	Ceiling Plate Rectangular 3500mm x 700mm	Standard Drop 2500mm	Components 5 large tubes 5 medium tubes 5 small tubes	Weight 102kg
LED Light Source 15 custom LED boards, totalling: 22,500 Source lumens 380 W 80CRI 2700K CCT				

Veil 15



Order Process

Pre Sale

Stage 1 Enquiry/Project Briefing · Client

The client provides overall dimensions and/or electronic plans/elevations of the space where the sculpture will be installed alongside information on budgetary restrictions, finishes selection and special site considerations.

Stage 2 Proposal · Haberdashery

Haberdashery produce a quotation for the recommended installation/s alongside images of relevant past projects (if necessary). Samples to illustrate components and fixings are also available on loan at this stage to illustrate the design intent.

Stage 3 Commissioning · Client

The client issues a purchase order and pays a deposit (100% unless otherwise agreed)

Briefing

Stage 4 Final Briefing · Client

- The client issues all relevant information for the production. This includes but is not limited to:
- As built floor plans/RCPs (3D model, 2D DWG or to scale PDF)*
 - Location/specification of existing down lights/power cables if relevant
 - Ceiling construction drawings and/or description**
 - General indication of type of formation required (e.g. naturalistic, structured)
 - Indication of the sculptures placement within the space
 - Information on key viewing points of the sculpture and/or which the sculpture must not block from the clients perspective
 - Information on lighting requirements: dimming system, lighting control system, mains power**

* If as built drawings are not available/accurate then Haberdashery can provide a survey service for an additional charge.

**If this information is not provided, the sculpture will be designed/produced according to the standard systems as noted in the product spec sheets/installation manuals

NB If this information subsequently changes or is added to resulting in a necessity for a redesign/redraw, this will be chargeable

Design

Stage 5a Composition Design Document · Haberdashery

Detailed drawings of the composition are produced by Haberdashery to show the sculpture within its designated space.

Designs are presented within a presentation document in the form of dimensioned plans/elevations, lighting plans (if required) and B/W renders. Photo realistic renders not included unless otherwise specified. Haberdashery's design fee includes one initial design and one small adjustment. Further redesigns will be chargeable.

Stage 5b Custom Solutions · Haberdashery

If a special fixing method is being produced for the commission (e.g. skylight suspension system), a second design document containing detailed production/installation drawings for this special element will be presented after the initial composition design has been approved.

Stage 6 Design Sign-off · Client

The client must approve (by signing the document) or make a request for adjustment within 5 working days from issue of the design document/s. Any delay past this will have implications on the overall project schedule.

Production

Stage 7 Manufacture · Haberdashery

The project components are put into production with Haberdashery's manufacturing partners and in house production team.

Stage 8 Assembly, Testing, Packing & Shipping · Haberdashery

All designs are fully assembled and tested within the Haberdashery workshop and then dismantled into sub-assemblies for shipping to all corners of the world.

Stage 9 Installation, Aftercare & Warranty · Haberdashery

Haberdashery will either send in house install teams or provide template/instructions to the client for installation. Haberdashery deliver an O+M manual and warranty with each sculpture, ensuring a long life with easy maintenance.

Stage 10 Repurposing · Haberdashery

Project components can be repurposed to suit alternative spaces or locations. Haberdashery can create new compositions which repurpose the client's original components to accommodate a renovation or change of property.

Get in touch
collection@
haberdashery.com
+44 (0) 207 503 7080

haberdashery.com